RNAV (RNP) Z RWY 35L

RENO/TAHOE INTL (RNO)

APP CRS	Rwy Ldg	10011
347°	TDZE	4410
	Apt Elev	4415


RNP AR APCH - GPS, min RNP 0.30. Authorization required.


T A -13° C — For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 35°C.

MALSR

MISSED APPROACH: Climb to 11000 on track 347° to TAKLE and hold, continue climb-in-hold to 11000. #Missed approach requires minimum climb of 216 feet per NM to 7200. *Missed approach requires minimum climb of 301 feet per NM to 7200.

D-ATIS	NORCL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

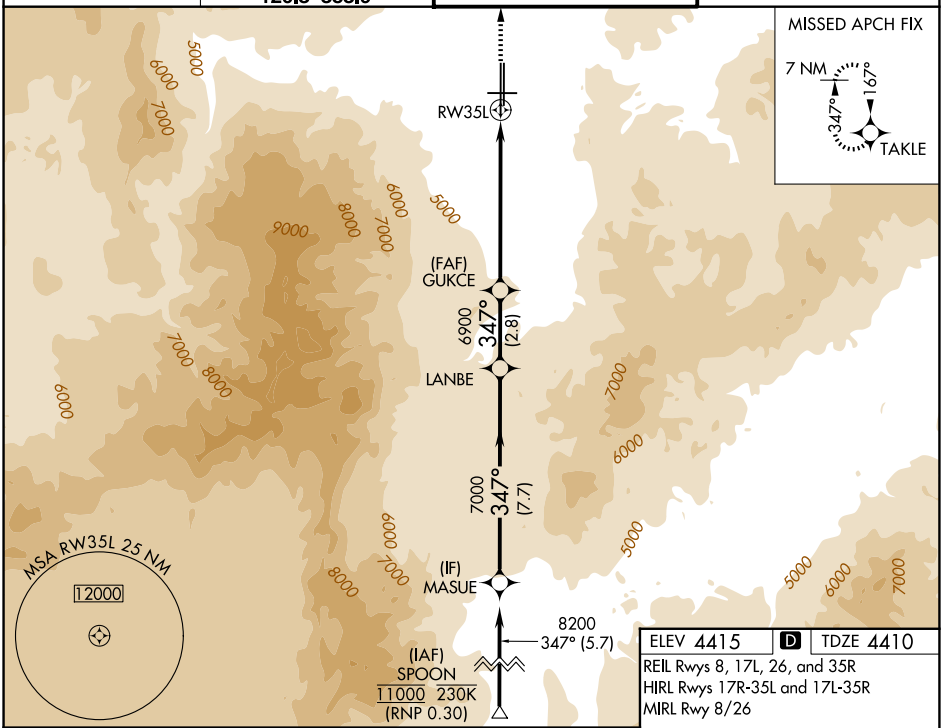

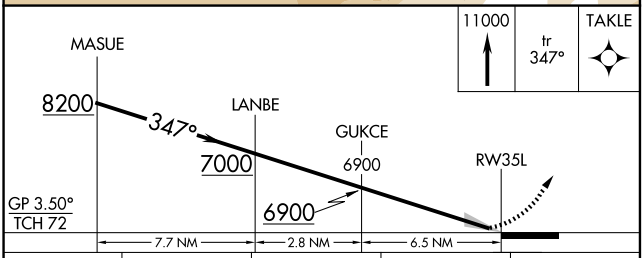

11000	tr 347°	TAKLE

CATEGORY	A	B	C	D
RNP 0.10 DA*		4753-5/8	343 (400-5/8)	
RNP 0.20 DA#		5193-1 3/4	783 (800-1 3/4)	
RNP 0.30 DA		5353-2	943 (1000-2)	


AUTHORIZATION REQUIRED

ELEV 4415 D TDZE 4410

REIL Rwys 8, 17L, 26, and 35R

HIRL Rwys 17R-35L and 17L-35R

MIRL Rwy 8/26

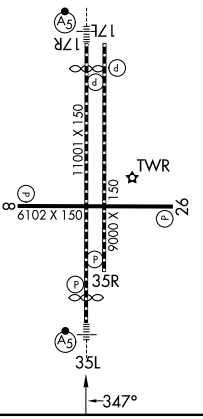

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026