RNAV (RNP) Z RWY 35R

RENO/TAHOE INTL (RNO)


APP CRS	Rwy Ldg	9000
347°	TDZE	4408
	Apt Elev	4415


RNP AR APCH-GPS, min RNP 0.30. Authorization required.

TA -13°C For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 34°C.

MISSED APPROACH: Climb to 11000 on track 347° to HOGBO and on track 345° to TAKLE and hold, continue climb-in-hold to 11000.
*Missed approach requires minimum climb of 306 feet per NM to 7200.

D-ATIS	NORCAL APP CON	RENO TOWER	GND CON
135.8 363.0	119.2 279.55 126.3 353.9	118.7 257.8	121.9 348.6

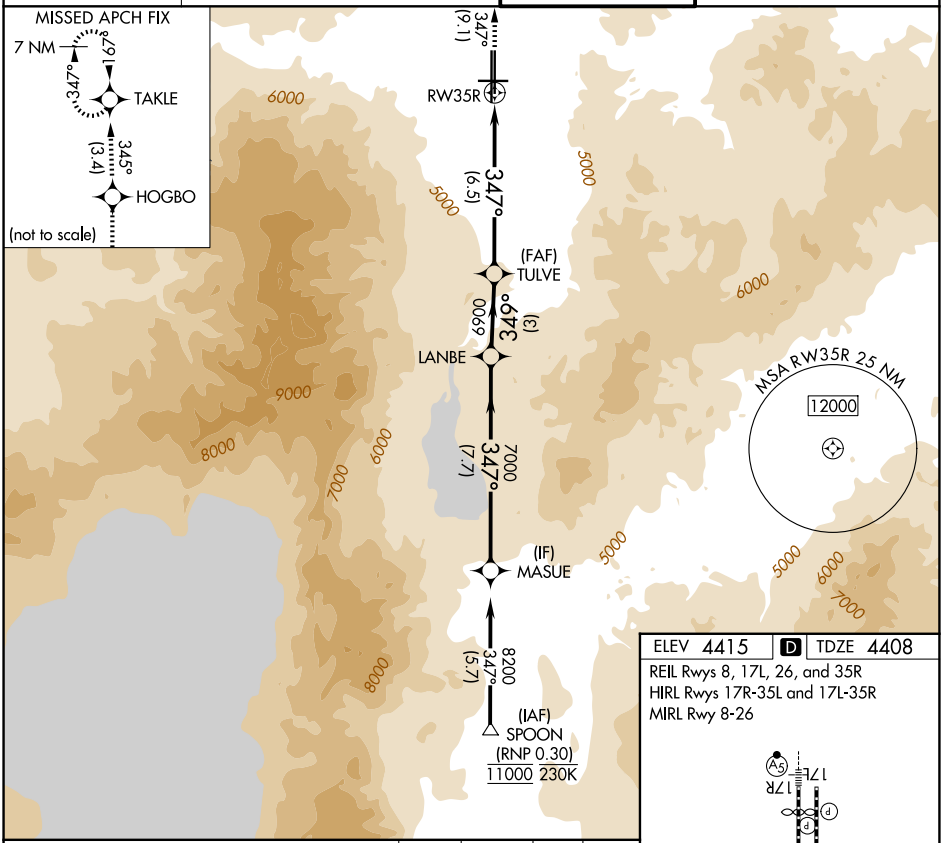

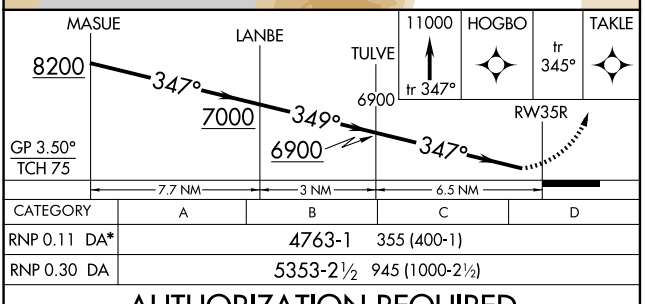


CATEGORY	A	B	C	D
RNP 0.11 DA*	4763-1	355 (400-1)		
RNP 0.30 DA	5353-2½	945 (1000-2½)		

AUTHORIZATION REQUIRED

ELEV 4415 D TDZE 4408

REIL Rwys 8, 17L, 26, and 35R
HIRL Rwys 17R-35L and 17L-35R
MIRL Rwy 8-26

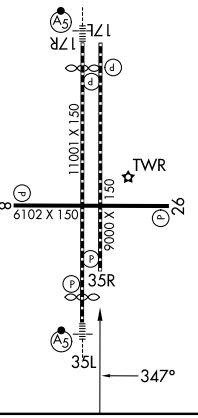

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026