LDA Y RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

LOC/DME I-SZK	APP CRS	Rwy Ldg 6800
111.1	072°	TDZE 1175
Chan 48		Apt Elev 1175

RADAR required for procedure entry. ADF required.
DME or RADAR required for LOC only.


For inop ALS, increase S-LDA 6 visibility Cats A/B to 1⅜ SM. Circling NA northwest of Rwy 6-24. Inop table does not apply to S-LDA 6 Cats C and D. Inop table does not apply to S-LDA/GS 6 all Cats.

-12° C


MALSR

MISSED APPROACH: Climb to 2200 then climbing right turn to 5000 direct VIT NDB and hold, continue climb-in-hold to 5000.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON
132.375	133.225 339.8	118.3 257.8	121.9 257.8

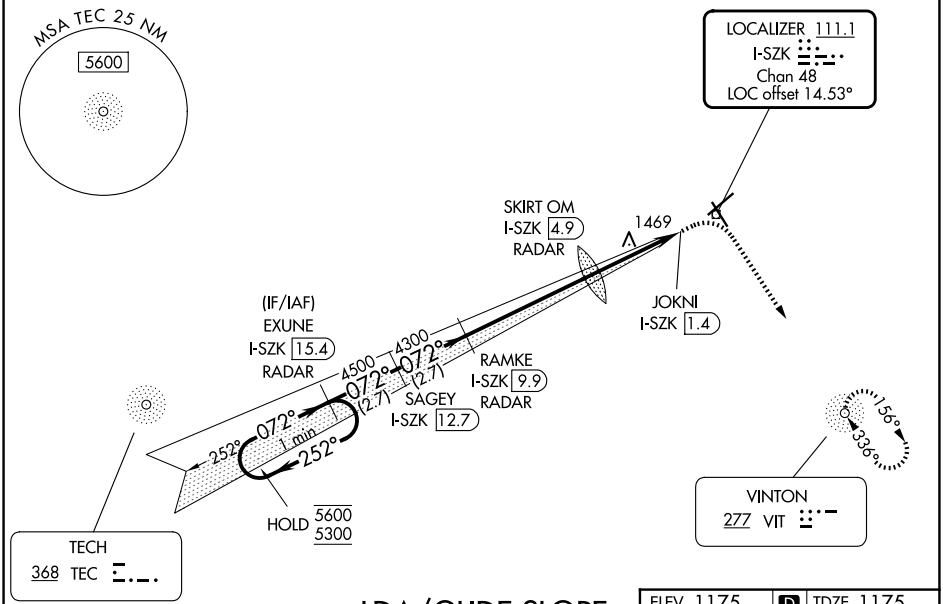


LDA/GLIDE SLOPE

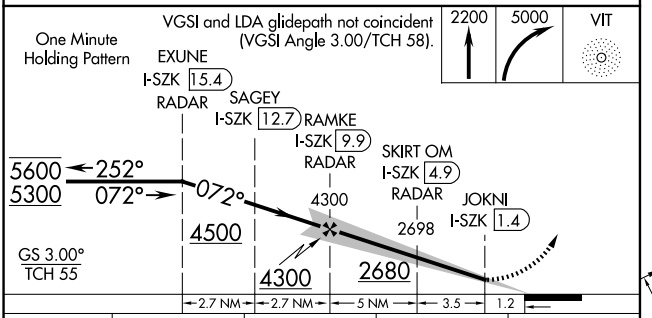

CATEGORY	A	B	C	D
S-LDA/GS 6	1857-2 682 (700-2)			
S-LDA 6	1880-1 705 (800-1)		1880-2 705 (800-2)	
CIRCLING	1880-1½ 705 (800-1½)		2460-3 1285 (1300-3)	2800-3 1625 (1700-3)

ELEV 1175 D TDZE 1175

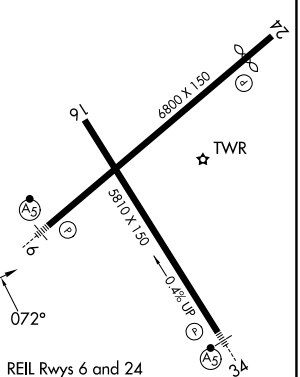

FAF to MAP 8.5 NM

Knots	60	90	120	150	180
Min:Sec	8:30	5:40	4:15	3:24	2:50

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026