LOC/DME I-SZK	APP CRS	Rwy Ldg 6800
111.1	072°	TDZE 1175
Chan 48		Apt Elev 1175

LDA Z RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)


ADF required. RADAR required for procedure entry.


-12°C For inop ALS, increase S-LDA/GS 6 visibility all Cats to ⅞ SM.

MALSR


MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct VIT NDB and hold, continue climb-in-hold to 5000. Missed approach requires minimum climb of 350 feet per NM to 3600.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON
132.375	133.225 339.8	118.3 257.8	121.9 257.8

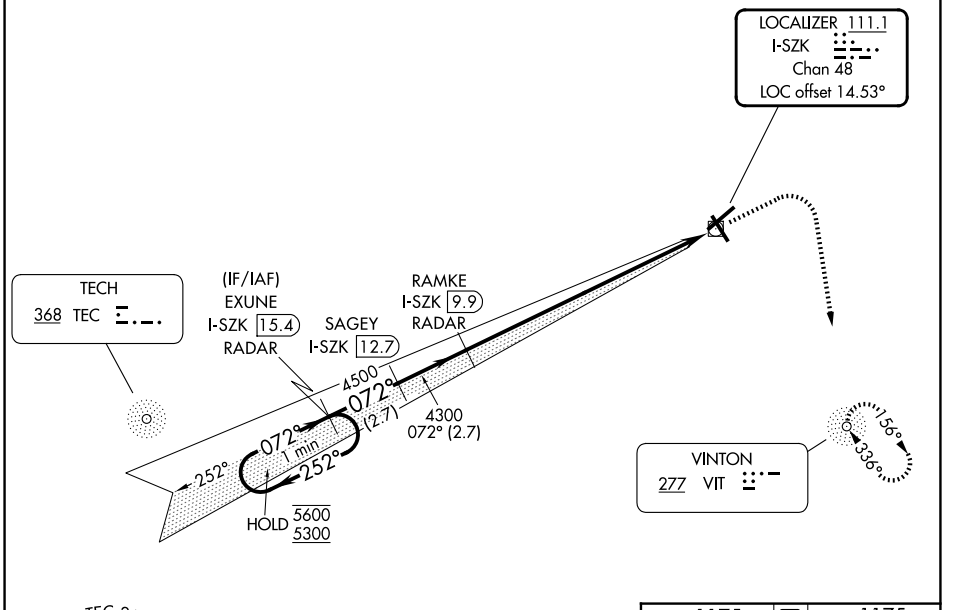




LDA/GLIDE SLOPE

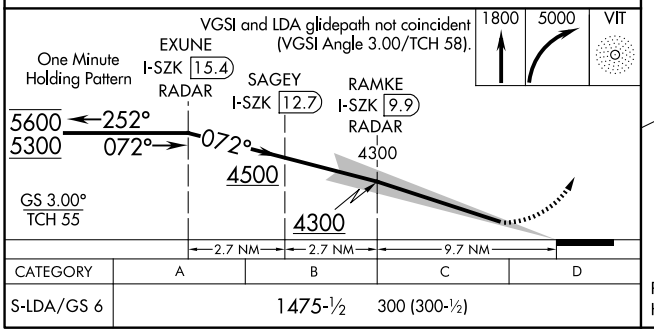

CATEGORY	A	B	C	D
S-LDA/GS 6	1475-½	300 (300-½)		

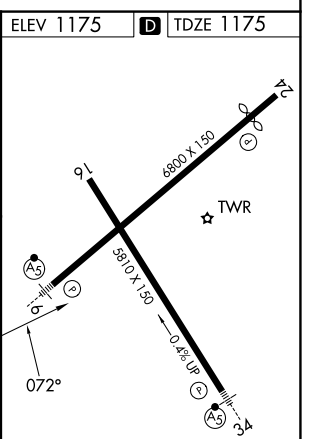

REIL Rwys 6 and 24
HIRL Rwys 6-24 and 16-34

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026