RNAV (RNP) Z RWY 34

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

APP CRS	Rwy Ldg	5810
336°	TDZE	1160
	Apt Elev	1175

RNP AR APCH. RF required.


Missed approach requires RNP less than 1.0. For inop ALS, increase RNP 0.30* all Cats visibility to 1⅜ SM. Inop table does not apply to RNP 0.30. For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C.

-12°C


MALSR


MISSED APPROACH: Climb to 6000 on track 336° to DMOSS, right turn to SETHB, right turn to JEEVY and on track 093° to PROSE and hold. * Missed approach requires minimum climb of 350 feet per NM to 4100. # Missed approach requires minimum climb of 415 feet per NM to 4100.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON
132.375	133.225 339.8	118.3 257.8	121.9 257.8

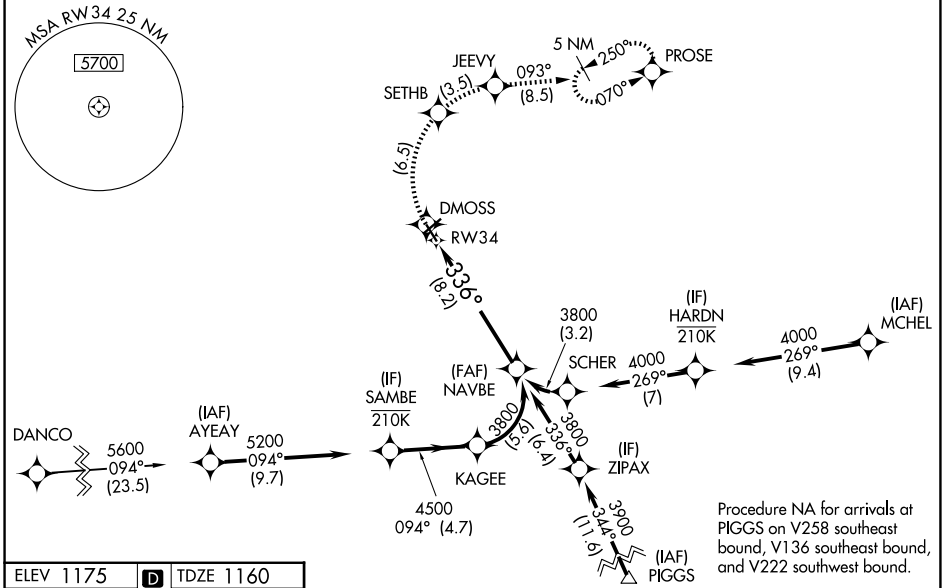

ELEV 1175 D TDZE 1160

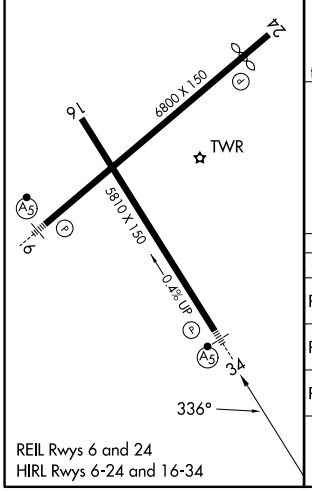

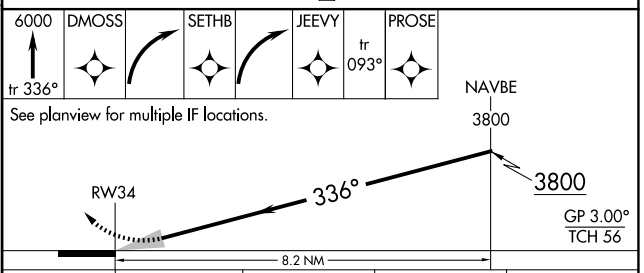

CATEGORY	A	B	C	D
RNP 0.15 DA#	1495-½ 335 (400-½)			
RNP 0.30 DA*	1646-1 486 (500-1)			
RNP 0.30 DA	2115-4 955 (1000-4)			

AUTHORIZATION REQUIRED

NE-3, 29 OCT 2026 to 26 NOV 2026