RNAV (RNP) Z RWY 6

ROANOKE/BLACKSBURG RGNL (WOODRUM FLD) (ROA)

APP CRS	Rwy Ldg	6800
058°	TDZE	1175
	Apt Elev	1175

RNP AR APCH - GPS.


For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to 7/8 SM.

-12°C

MALSR


MISSED APPROACH: (Do not exceed 240K until DEWET) Climb to 1600 then climbing right turn to 5000 direct DEWET and hold, continue climb-in-hold to 5000. *Missed approach requires minimum climb of 370 feet per NM to 2900.

ATIS	ROANOKE APP CON	ROANOKE TOWER	GND CON
132.375	133.225 339.8	118.3 257.8	121.9 257.8

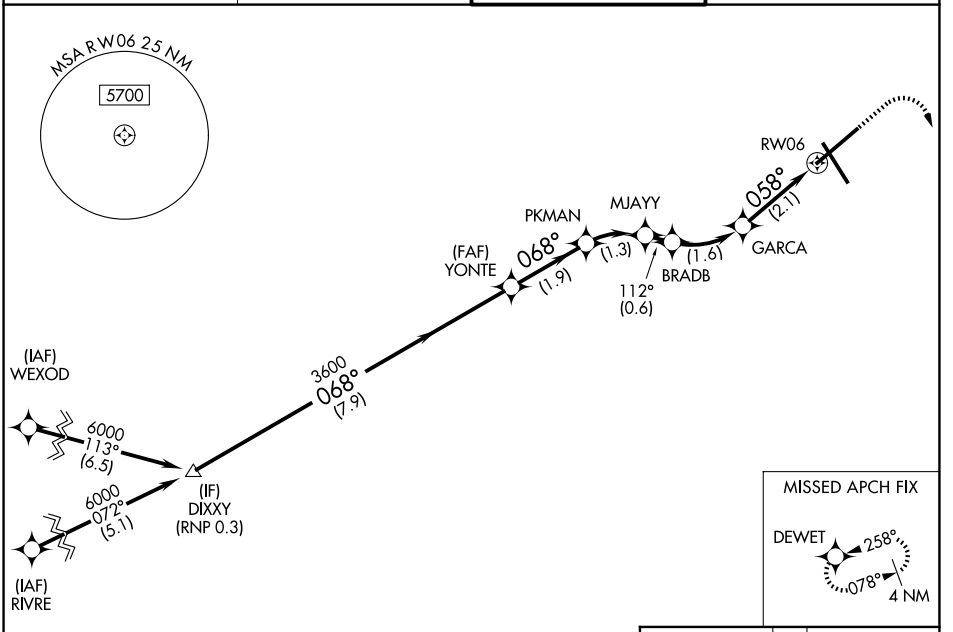


MISSED APCH FIX

ELEV 1175 D TDZE 1175

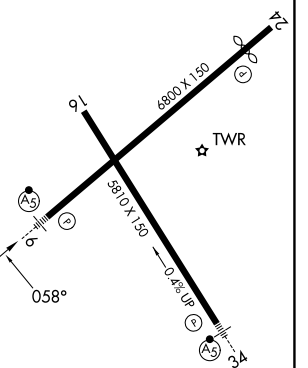

REIL Rwys 6 and 24
HIRL Rwys 6-24 and 16-34

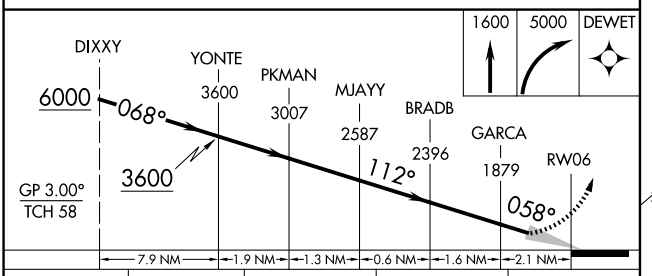

CATEGORY	A	B	C	D
RNP 0.20 DA*	1444-½	269 (300-½)		
RNP 0.30 DA	1605-¾	430 (500-¾)		

AUTHORIZATION REQUIRED

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026