WAAS	APP CRS	Rwy Ldg	5503
CH 62810	019°	TDZE	21
W02A		Apt Elev	24

RNAV (GPS) RWY 2
SACRAMENTO EXEC (SAC)


RNP APCH-GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM, increase LNAV all Cats visibility to 1 SM.

MALSR A5


MISSED APPROACH: Climb to 440 then climbing left turn to 2000 direct JIRAG and hold.


ATIS	NORCAL APP CON	EXEC TOWER ★	GND CON	UNICOM
118.075	125.25 257.9	119.5 (CTAF) L 278.8	125.0	122.95

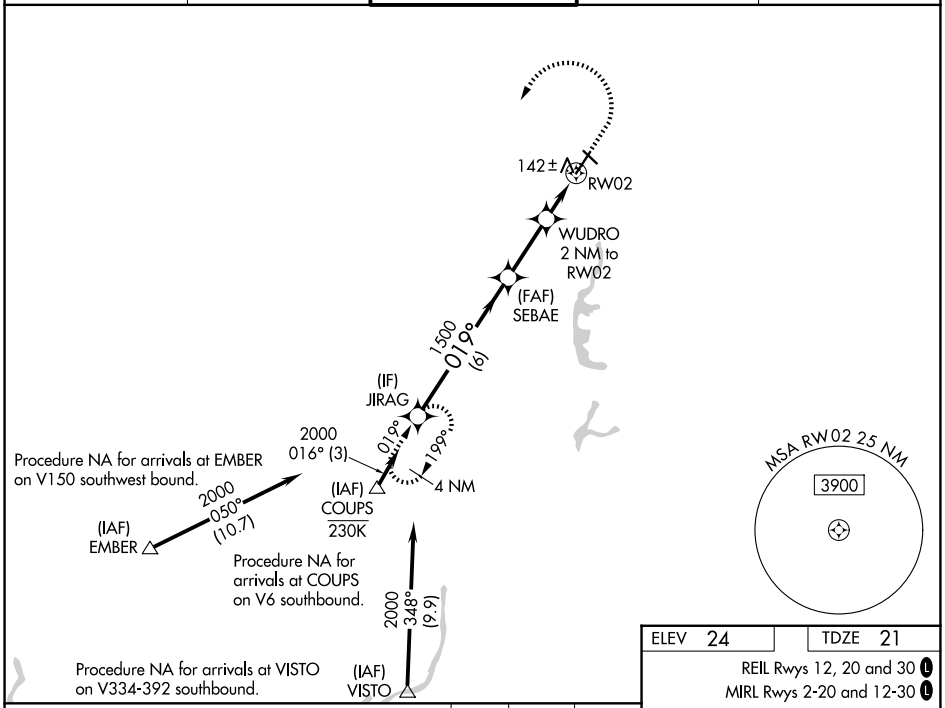

ELEV 24	TDZE 21

REIL Rwys 12, 20 and 30 L
MIRL Rwys 2-20 and 12-30 L

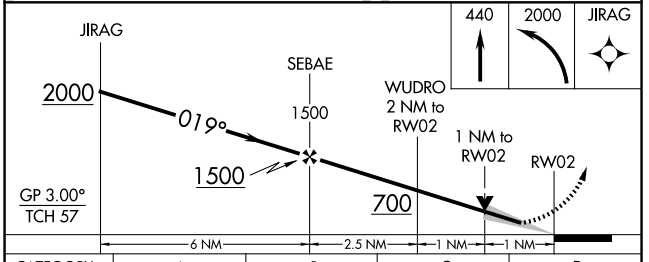



CATEGORY	A	B	C	D
LPV DA	221-½ 200 (200-½)			
LNAV/VNAV DA	304-½ 283 (300-½)			
LNAV MDA	400-½ 379 (400-½)		400-⅝ 379 (400-⅝)	
CIRCLING	500-1 476 (500-1)	520-1 496 (500-1)	560-1½ 536 (600-1½)	800-2½ 776 (800-2½)

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026