ILS or LOC RWY 24

ST LOUIS LAMBERT INTL (STL)

LOC/DME I-STL	APP CRS	Rwy Ldg	7603
110.3	244°	TDZE	534
Chan 40		Apt Elev	618


RADAR required for procedure entry.


Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1⅝ SM.

MALS (A)


MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)

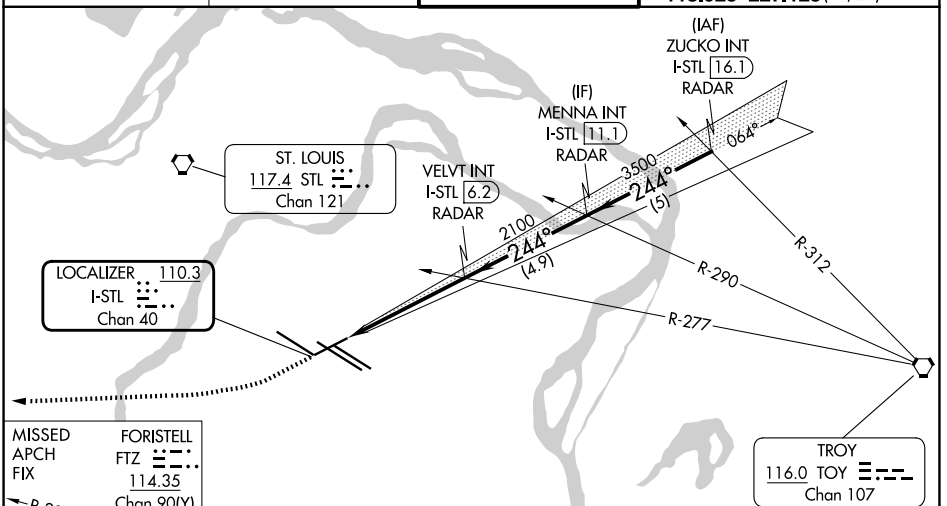





MERAM



ELEV 618 D TDZE 534

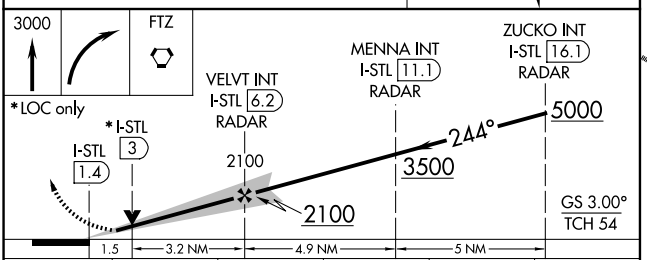



CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40 546 (500-¾)		1080-1⅜ 546 (500-1⅜)		

HIRL all rwys

TDZL/RCLS Rwys 11, 12L, 12R, 29, and 30R

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026