RNAV (GPS) RWY 24

ST LOUIS LAMBERT INTL (STL)

WAAS CH 87021 W24A	APP CRS 244°	Rwy Ldg 7603 / TDZE 534 / Apt Elev 617


RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV Cat E visibility to 1⅜ SM and LNAV Cat E visibility to 1⅝ SM.


MALS (A4)


MISSED APPROACH: Climb to 3000 direct SORUE and on track 294° to AUGST and hold.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

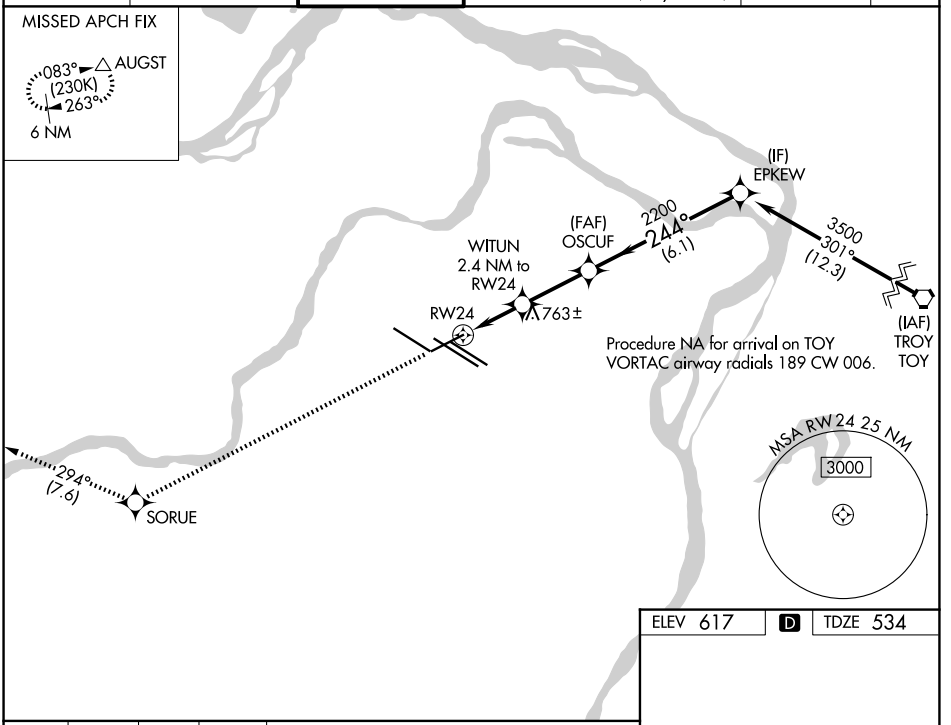

ELEV 617 | D | TDZ 534

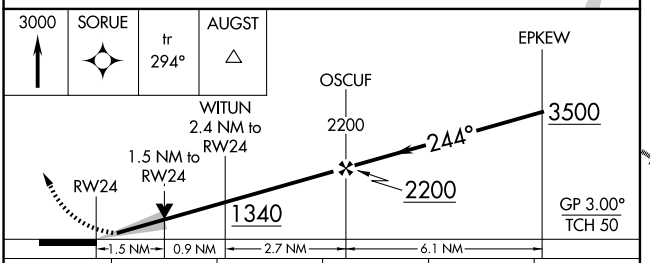



CATEGORY	A	B	C	D	E
LPV DA	734/40 200 (200-¾)				
LNAV/VNAV DA	1015/60 481 (400-1¼)				
LNAV MDA	1080/40 546 (500-¾)		1080-1⅜ 546 (500-1⅜)		

HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026