RNAV (GPS) RWY 6

ST LOUIS LAMBERT INTL (STL)

WAAS	APP CRS	Rwy Ldg	7323
CH 93747	064°	TDZE	551
W06A		Apt Elev	617


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 6 helicopter visibility reduction below RVR 4000 NA. For inop ALS increase LPV all Cats visibility to RVR 5500; LNAV/VNAV all Cats visibility to 1⅜ SM; LNAV Cat A and B visibility to RVR 5500; and LNAV Cat C, D, and E visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON
125.025 379.925	132.125 360.6	132.475 239.275	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)

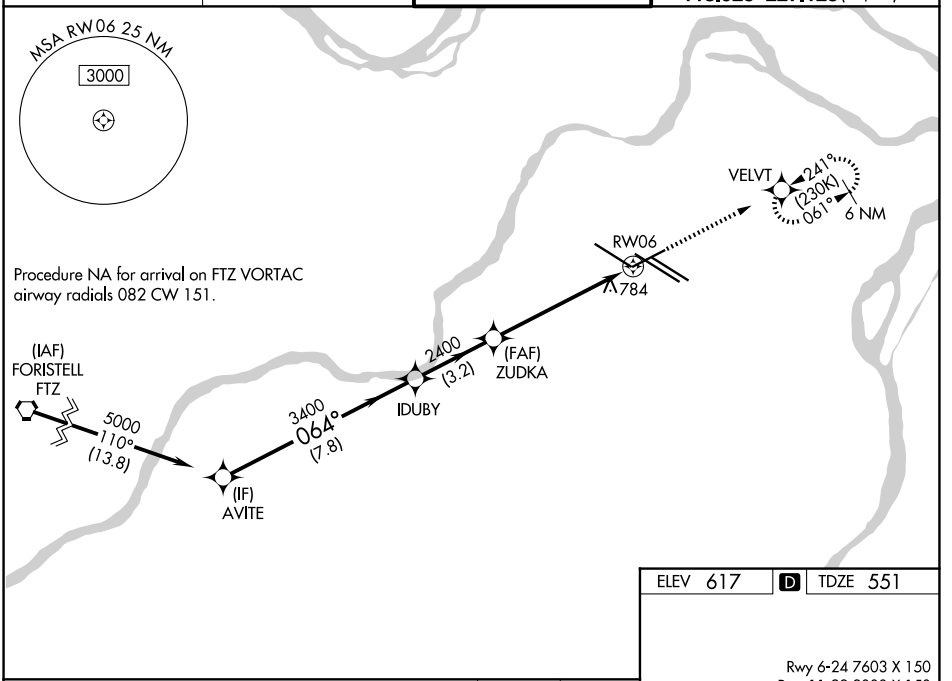


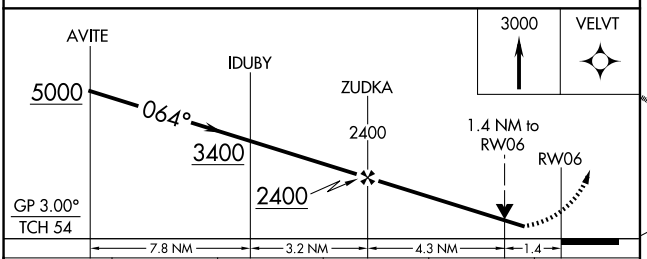

CATEGORY	A	B	C	D	E
LPV DA	910/40 359 (300-¾)				
LNAV/VNAV DA	1040/50 489 (500-1)				
LNAV MDA	1040/40 489 (500-¾)		1040/50 489 (500-1)		

ELEV 617 D TDZE 551

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150



HIRL all rwys
TDZL/RCLS Rwys 11, 12L, 12R, 29, and 30R

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026