RNAV (RNP) Z RWY 12L

ST LOUIS LAMBERT INTL (STL)

APP CRS	Rwy Ldg	8956
123°	TDZE	541
	Apt Elev	617

RNP AR APCH - GPS. Authorization required from HRBEE or RRIPP: RF.


RADAR required for procedure entry

Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 11, except for arrivals at RRIPP and HRBEE. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 3000 direct ODITY and track 071° to TOY VORTAC and hold.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

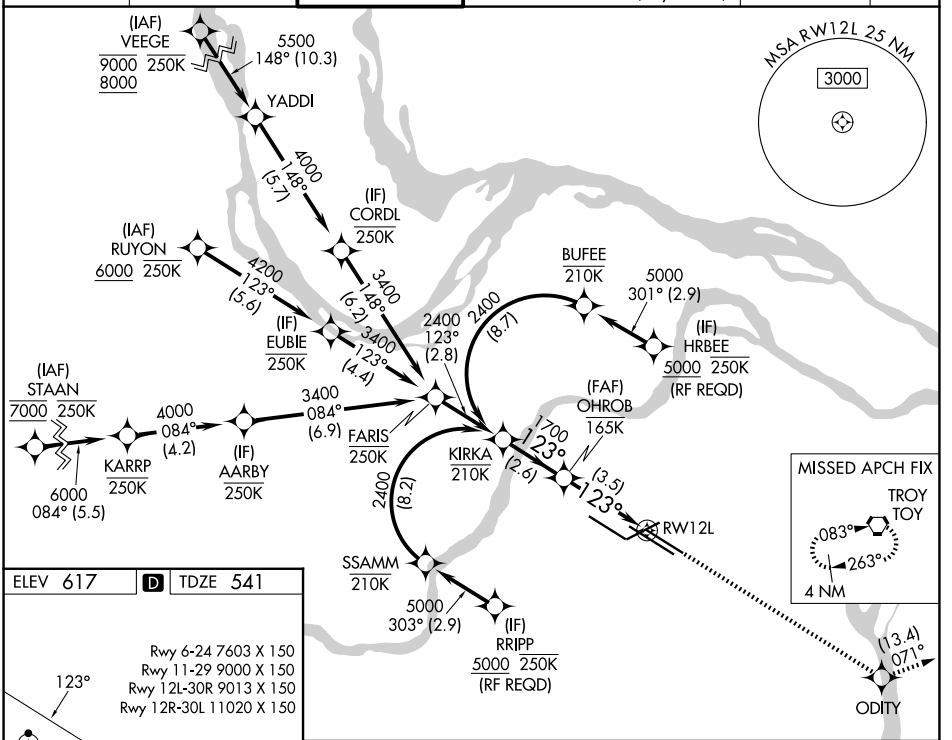

ELEV 617 D TDZE 541

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150




HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 60).

3000	ODITY	tr 071°	TOY

See planview for multiple IF locations.

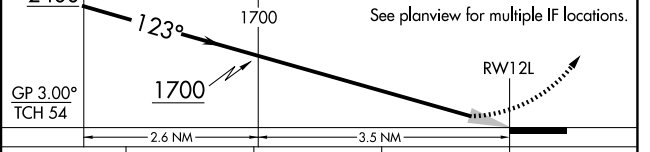

CATEGORY	A	B	C	D
RNP 0.30 DA	1055/55 514 (500-1)			

AUTHORIZATION REQUIRED

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026