| WAAS CH 82699 W11A | APP CRS 123° | Rwy Ldg 9000 TDZE 618 Apt Elev 618 |
|---|---|---|

# RNAV (GPS) Y RWY 11

ST LOUIS LAMBERT INTL (STL)


RNP APCH.


Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000 and LNAV Cat E visibility to 1¼ SM.

ALSF-2


MISSED APPROACH: Climb to 3000 direct YOBUC and on track 195° to IMPER and hold.

| D-ATIS | ST. LOUIS APP CON | ST. LOUIS TOWER | GND CON | CLNC DEL | CPDLC |
|---|---|---|---|---|---|
| 125.025 379.925 | 132.125 360.6 | 132.475 239.275 | 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29) | 119.5 363.1 | |

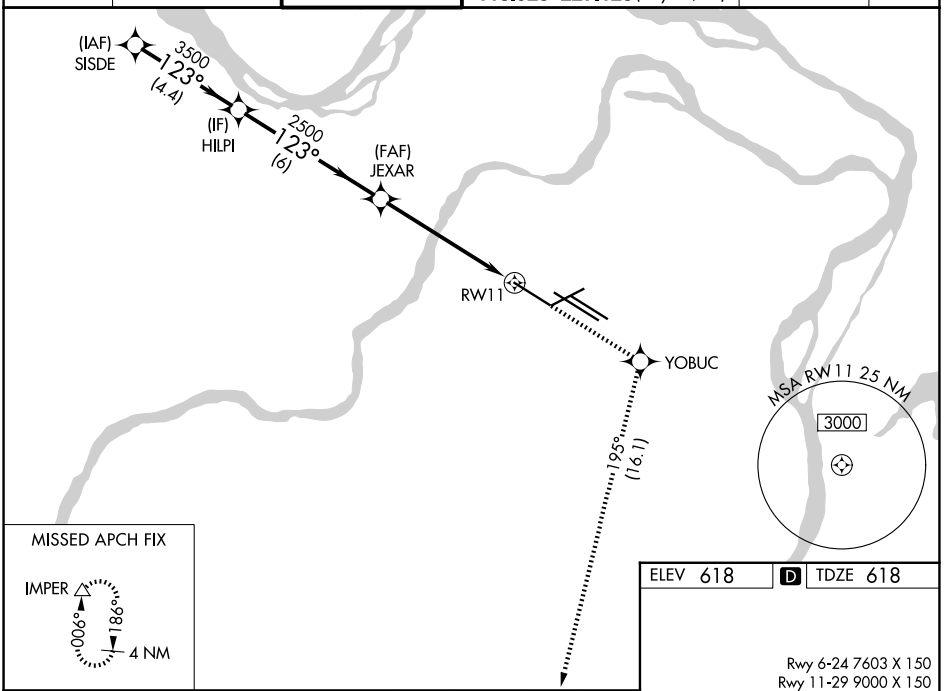

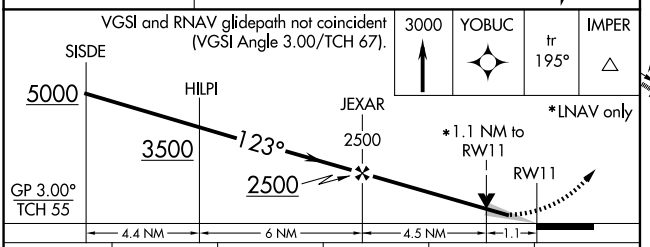
| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA | 868/18 250 (300-½) | | | | |
| LNAV/VNAV DA | 960/40 342 (400-¾) | | | | |
| LNAV MDA | 1040/24 422 (500-½) | | 1040/40 422 (500-¾) | 1040/50 422 (500-1) | |

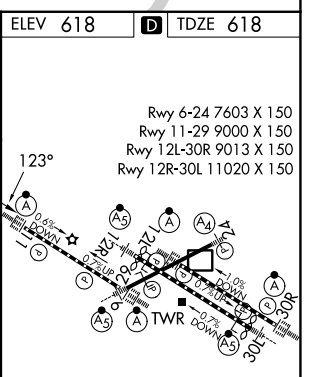


HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R



NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026