RNAV (GPS) Y RWY 12L

ST LOUIS LAMBERT INTL (STL)

WAAS	APP CRS	Rwy Ldg	8956
CH 69499	123°	TDZE	541
W12A		Apt Elev	617

RNP APCH - GPS.


RADAR required for procedure entry.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Simultaneous approach authorized with Rwy 11. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 6000, LNAV/VNAV all Cats visibility to 1⅜ SM, and LNAV Cat C/D/E visibility to 1⅜ SM.


ALSF-2

MISSED APPROACH: Climb to 3000 direct ODITY and on track 071° to TOY VORTAC and hold.


D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025 379.925	132.125 360.6	120.05 284.6	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	119.5 363.1	

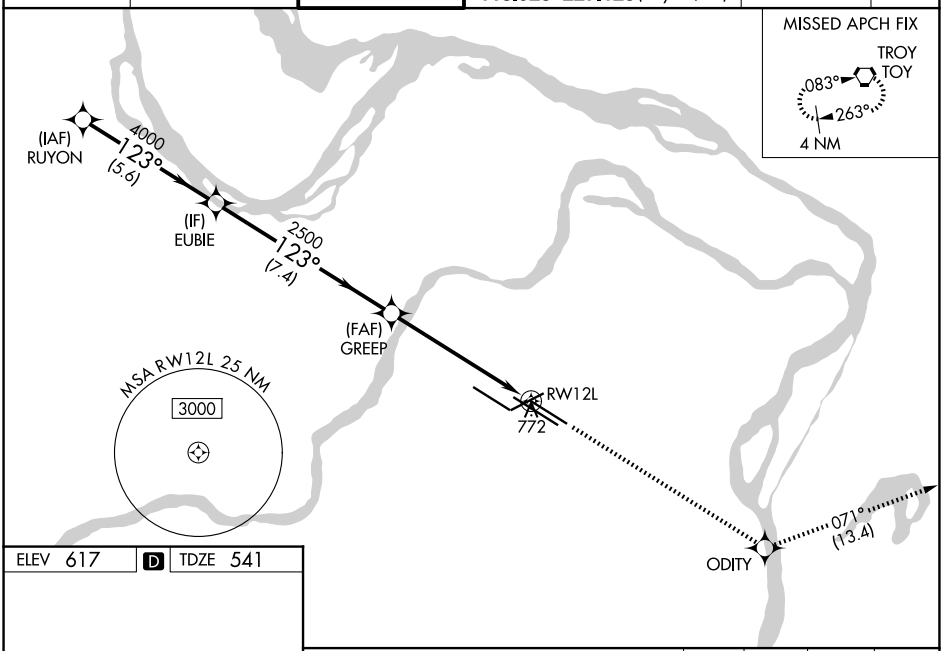

ELEV 617 | D | TDZE 541



HIRL all Rwys
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R

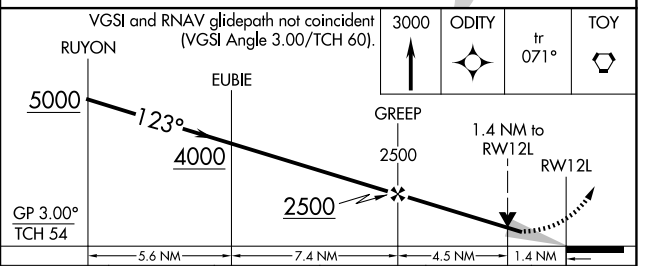

CATEGORY	A	B	C	D	E
LPV DA	951/50 410 (400-1)				
LNAV/VNAV DA	1040/60 499 (500-1¼)				
LNAV MDA	1040/24 499 (500-½)		1040/50 499 (500-1)		1040/60 499 (500-1¼)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026