RNAV (GPS) Y RWY 12R

ST LOUIS LAMBERT INTL (STL)

WAAS	APP CRS	Rwy Ldg	10552
CH 78121	123°	TDZE	540
W12B		Apt Elev	617


RNP APCH - GPS.

T Rwy 12R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Simultaneous approach authorized with Rwy 11. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1⅝ SM, LNAV Cats A/B visibility to RVR 5500, and LNAV Cat C/D/E visibility to 1⅜ SM.

MALSR (A5)


MISSED APPROACH: Climb to 5000 direct FONTI and hold, continue climb-in-hold to 5000.

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON
125.025 379.925	132.125 360.6	118.5 257.7	121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (11/29)

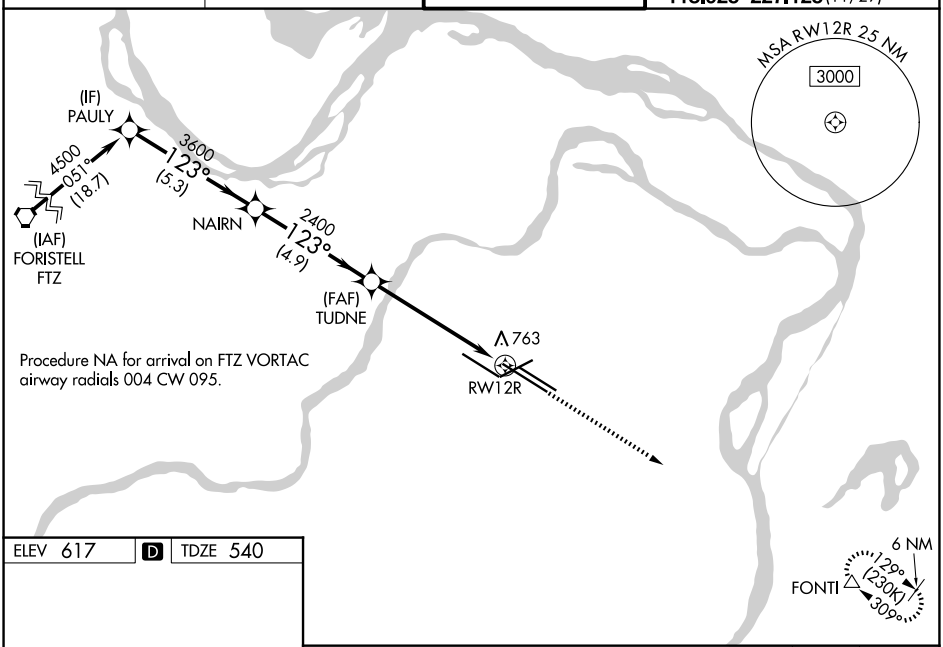


ELEV 617 | D | TDZE 540

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150



HIRL all rwys
TDZL/RCLS Rwys 11, 12L, 12R, 29, and 30R

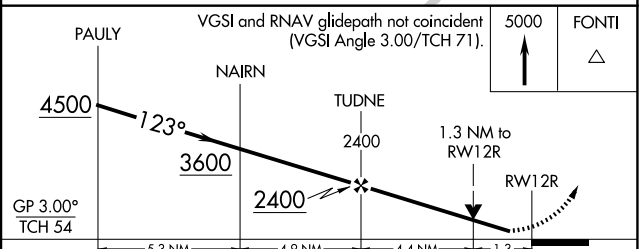

CATEGORY	A	B	C	D	E
LPV DA	740/18 200 (200-½)				
LNAV/VNAV DA	1103-1¼ 563 (500-1¼)				
LNAV MDA	1020/40 480 (500-¾)		1020/50 480 (500-1)		

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026