LOC/DME I-MOY	APP CRS	Rwy Ldg 12002
109.5	164°	TDZE 4231
Chan 32		Apt Elev 4231

ILS or LOC RWY 16L

SALT LAKE CITY INTL (SLC)

RNP APCH-GPS. From EKKHO.


DME or RADAR required. RADAR required for procedure entry at WEBER.


Simultaneous approach authorized.
For inop ALS, increase S-LOC 16L Cat C/D visibility to 1⅜ SM.


ALSF-2

MISSED APPROACH: Climb to 4800 then climb to 10000 on FFU VORTAC R-341 to FFU VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	119.05 257.8	123.775 348.6

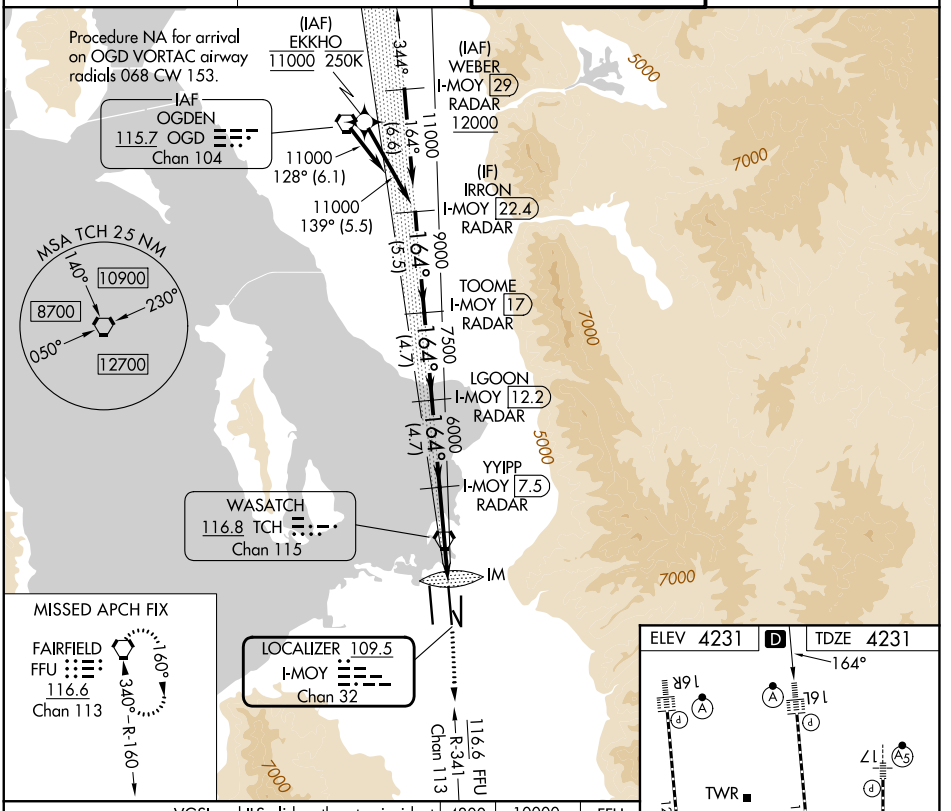

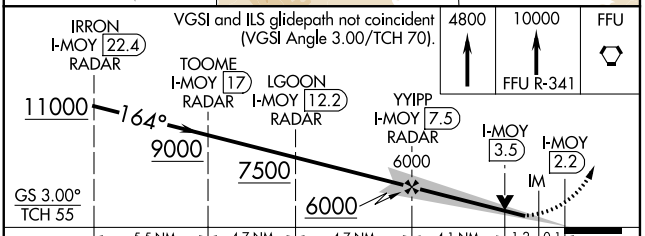

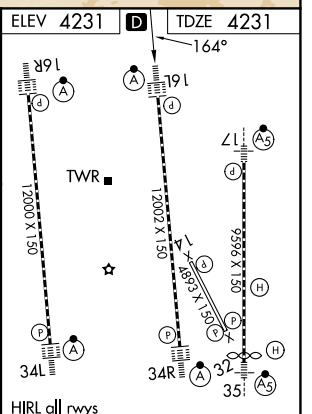

HIRL all rwys
TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

CATEGORY	A	B	C	D
S-ILS 16L	4431/18 200 (200-½)			
S-LOC 16L	4720/24 489 (500-½)		4720/50 489 (500-1)	

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026