LOC/DME I-UAT	APP CRS	Rwy Ldg	12000
111.9	164°	TDZE	4226
Chan 56		Apt Elev	4231

ILS or LOC RWY 16R

SALT LAKE CITY INTL (SLC)

RNP APCH - GPS. From EKKHO or WEBER.


DME or RADAR required.


Simultaneous approach authorized. For inop ALS, increase S-LOC 16R Cat A and B visibilities to RVR 5500, and Cat C and D visibilities to 1⅜ SM.


ALSF-2

MISSED APPROACH: Climb to 4800 then climbing right turn to 8100 on heading 310° and on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6

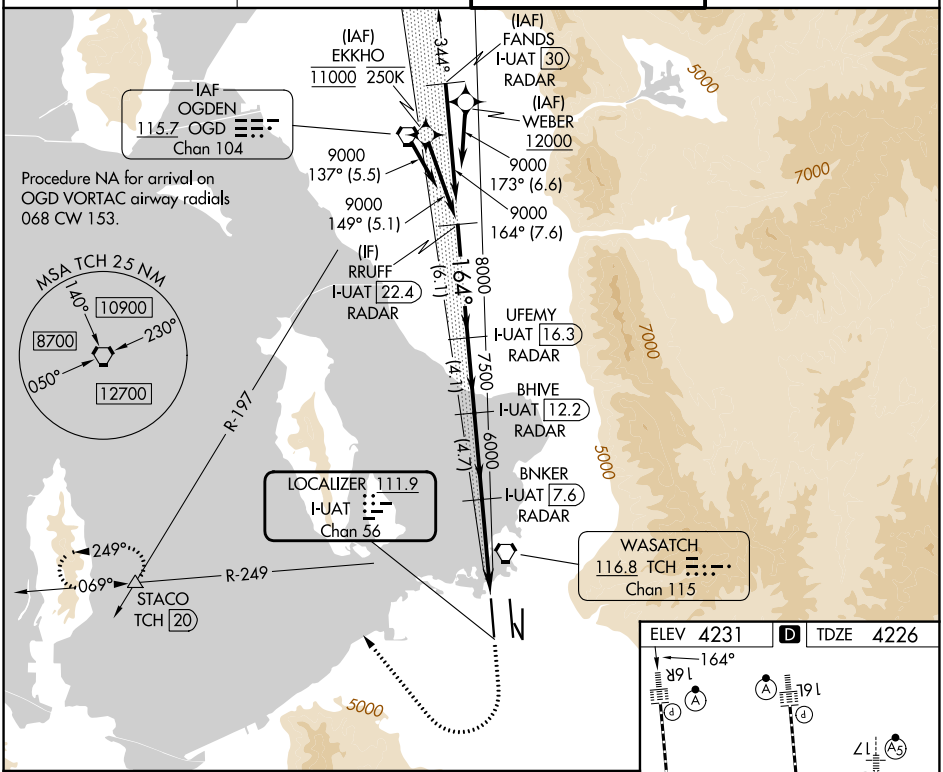

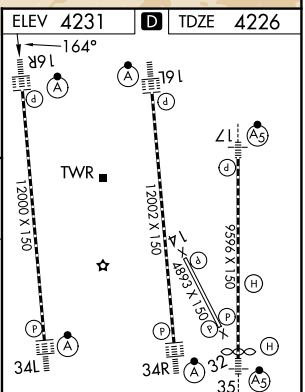

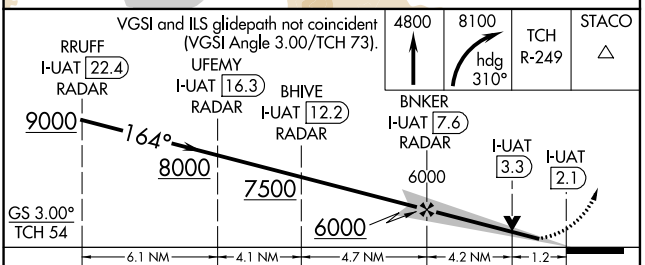

CATEGORY	A	B	C	D
S-ILS 16R	4426/18 200 (200-½)			
S-LOC 16R	4680/24 454 (500-½)		4680/45 454 (500-⅞)	

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026