ILS or LOC RWY 34L

SALT LAKE CITY INTL (SLC)

LOC/DME I-UUH	APP CRS	Rwy Ldg	12000
111.9	344°	TDZE	4229
Chan 56		Apt Elev	4231

RNP APCH-GPS. From QWENN or JAZZZ.


DME or RADAR required.

Simultaneous approach authorized. For inop ALS, increase S-LOC 34L Cat C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 on TCH VORTAC R-249 to STACO INT/TCH 20 DME and hold.


D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6

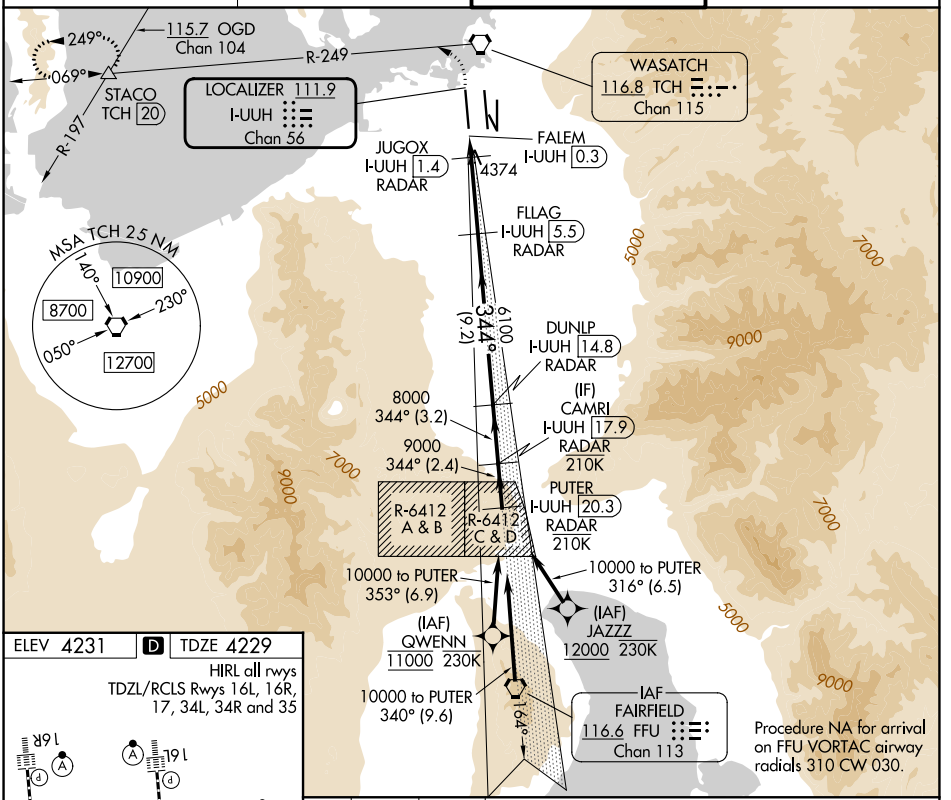

ELEV 4231 D TDZE 4229

HIRL all rwys


TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

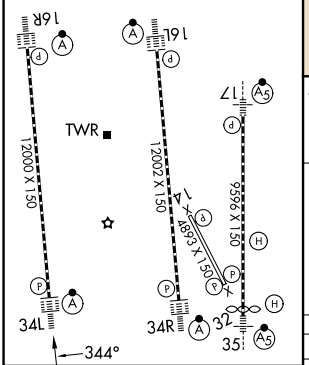

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

4800 | 8100 TCH R-249 | STACO

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

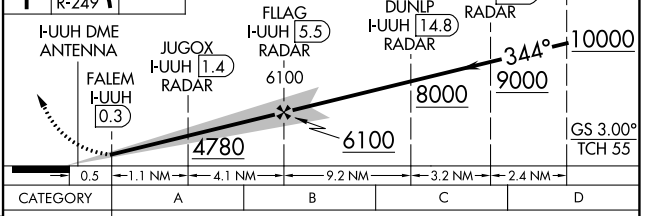

CATEGORY	A	B	C	D
S-ILS 34L	4429/18 200 (200-½)			
S-LOC 34L	4640/24 411 (500-½)		4640/40 411 (500-¾)	

SW-4, 29 OCT 2026 to 26 NOV 2026