WAAS	APP CRS	Rwy Ldg	9272
CH 42843	344°	TDZE	4227
W35A		Apt Elev	4231

RNAV (GPS) RWY 35

SALT LAKE CITY INTL (SLC)


RNP APCH - GPS.


Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 49°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV all Cats visibility to RVR 4500, and increase LNAV Cats C/D/E visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 9000 direct KNOBY and on track 334° OGD VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	118.3 257.8	121.9 348.6



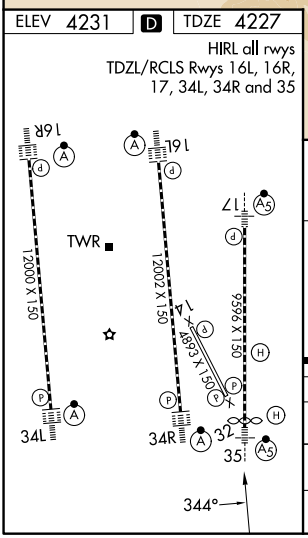

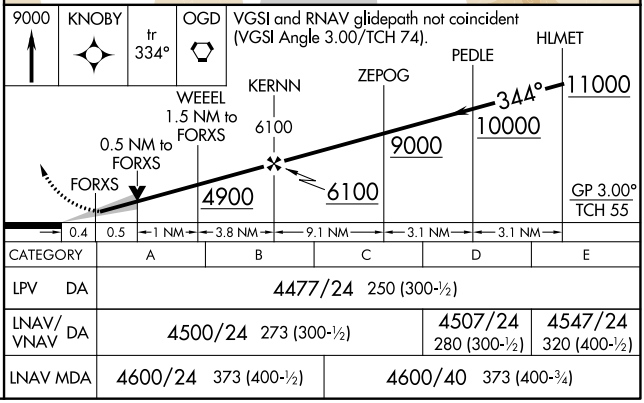

CATEGORY	A	B	C	D	E
LPV DA	4477/24 250 (300-½)				
LNAV/VNAV DA	4500/24 273 (300-½)			4507/24 280 (300-½)	4547/24 320 (400-½)
LNAV MDA	4600/24 373 (400-½)			4600/40 373 (400-¾)	

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026