RNAV (RNP) Z RWY 34L

SALT LAKE CITY INTL (SLC)

APP CRS	Rwy Ldg	12000
344°	TDZE	4229
	Apt Elev	4231


RNP AR APCH - GPS. Authorization required. From PEFNO: RF.

For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10*, RNP 0.20 visibility all Cats to RVR 4500, RNP 0.30 visibility all Cats to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 direct STACO and hold.
*Missed approach requires minimum climb of 250 feet per NM to 4700.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	132.65 336.4	123.775 348.6

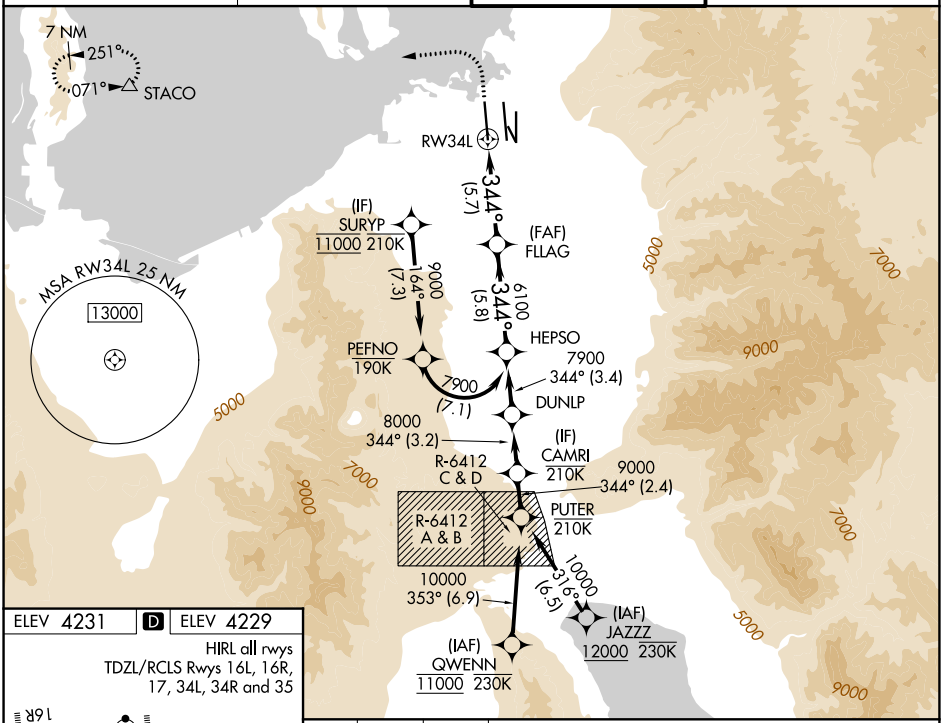

ELEV 4231 | D | ELEV 4229


HIRL all rwys
TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

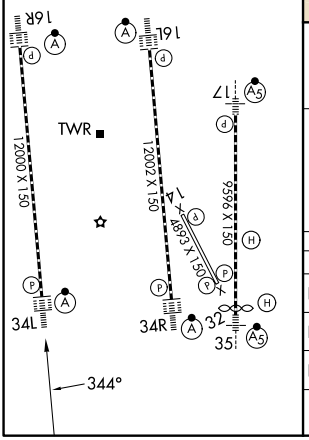

4800	8100	STACO
↑	↱	△

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

See planview for multiple IF locations.

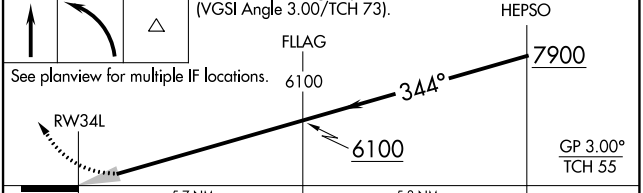

CATEGORY	A	B	C	D
RNP 0.10 DA*	4490/24	261 (300-½)		
RNP 0.20 DA	4530/24	301 (300-½)		
RNP 0.30 DA	4643/40	414 (500-¾)		

AUTHORIZATION REQUIRED

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026