RNAV (RNP) Z RWY 34R

SALT LAKE CITY INTL (SLC)

APP CRS	Rwy Ldg	12002
344°	TDZE	4225
	Apt Elev	4231

RNP AR APCH - GPS. Authorization required.

For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on track 336° to OGD VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	119.05 257.8	123.775 348.6

MISSED APCH FIX

8 NM 126° 306° OGDEN OGD

MSA RW34R 25 NM 13000

336° (23) WASATCH TCH

RW34R

344° (5.7) (FAF) CHEVL

344° (9.1) 6100

HAKKR 190K 9000 344° (3.1)

(IF) ALGIE 210K 10000 344° (2.4)

R-6412 C & D

R-6412 A & B

PLAGE 210K

11000 001° (7.1)

325° (6.1) 11000

(IAF) QWENN 11000 230K


(IAF) JAZZ 12000 230K


5000 7000 9000

ELEV 4231 D TDZE 4225

HIRL all rwys

TDZL/RCLS Rwys 16L, 16R, 17, 34L, 34R and 35

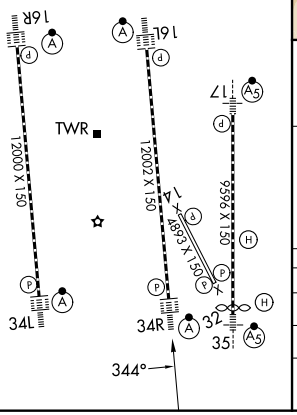

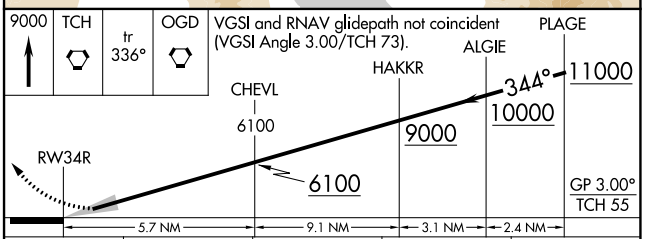

CATEGORY	A	B	C	D
RNP 0.10 DA	4546/26 321 (400-½)			
RNP 0.30 DA	4609/35 384 (400-⅝)			

AUTHORIZATION REQUIRED

SW-4, 29 OCT 2026 to 26 NOV 2026