RNAV (GPS) RWY 3

SAN ANGELO RGNL/MATHIS FLD (SJT)

WAAS	APP CRS		
CH 77517	038°	Rwy Ldg	5940
W03A		TDZE	1917
		Apt Elev	1919


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 3800 direct LITAZ and hold.

ATIS	SAN ANGELO APP CON ★	MATHIS TOWER ★	GND CON	UNICOM
128.45 319.0	125.35 354.1	118.3 (CTAF) L 284.7	121.9 348.6	122.95

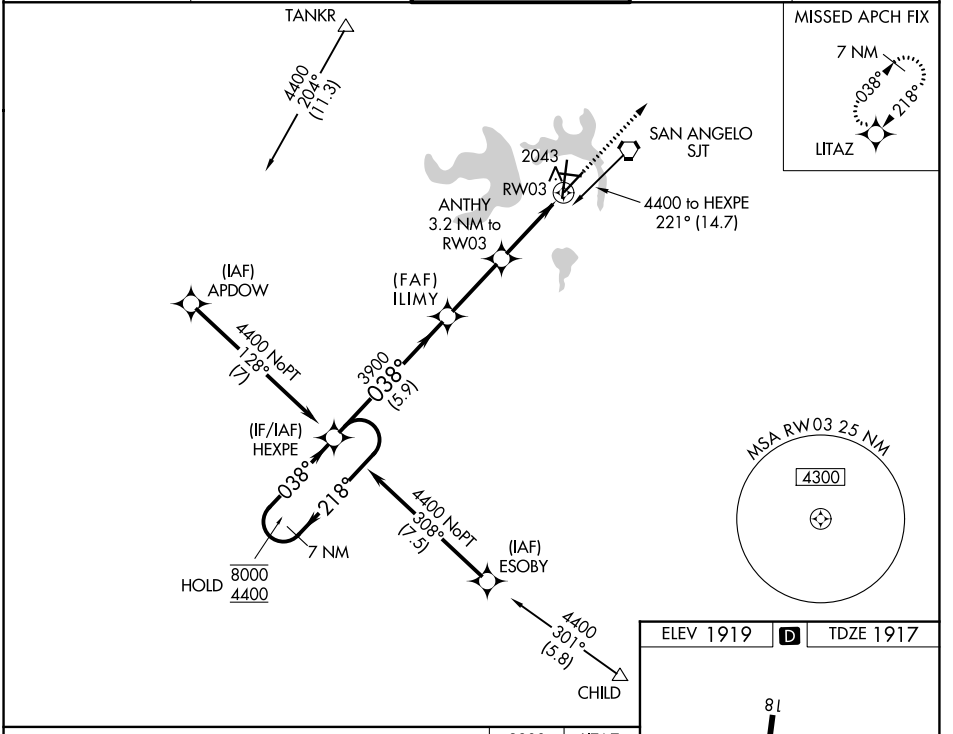

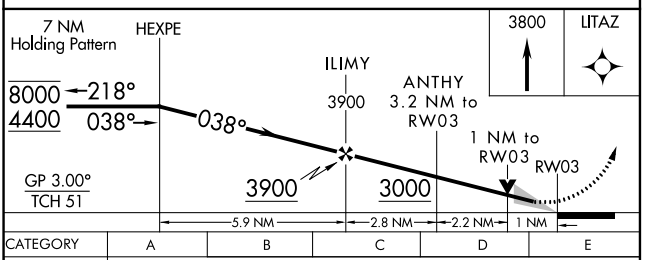

CATEGORY	A	B	C	D	E
LPV DA #	2117/24 200 (200-½)				
LNAV/VNAV DA	2300/35 383 (400-⅝)				
LNAV MDA	2300/24 383 (400-½)		2300/35 383 (400-⅝)		
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1½ 581 (600-1½)	2700-2½ 781 (800-2½)	2700-2¾ 781 (800-2¾)

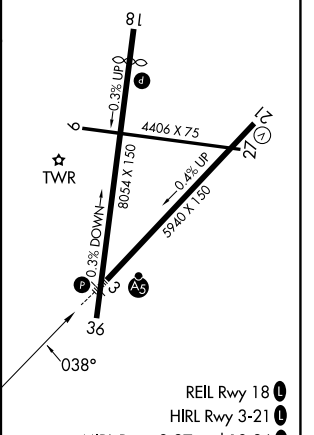

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026