WAAS	APP CRS	Rwy Ldg	11236
CH 48803	284°	TDZE	13
W28A		Apt Elev	13

RNAV (GPS) Z RWY 28R

SAN FRANCISCO INTL (SFO)


RNP APCH - GPS.

Circling NA to Rwys 10L, 10R, 19L, and 19R. Circling Rwy 1L, 1R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¾ SM, increase LNAV Cat C/D visibility to 2 SM.


ALSF-2

MISSED APPROACH: Climb to 3000 direct VIKYU and hold.
*Missed approach requires minimum climb of 350 feet per NM to 1900; if unable to meet climb gradient, see RNAV (GPS) RWY 28L.


D-ATIS	NORCAL APP CON	SAN FRANCISCO TOWER	GND CON
113.7 115.8 118.85	134.5 338.2	120.5 269.1	121.8

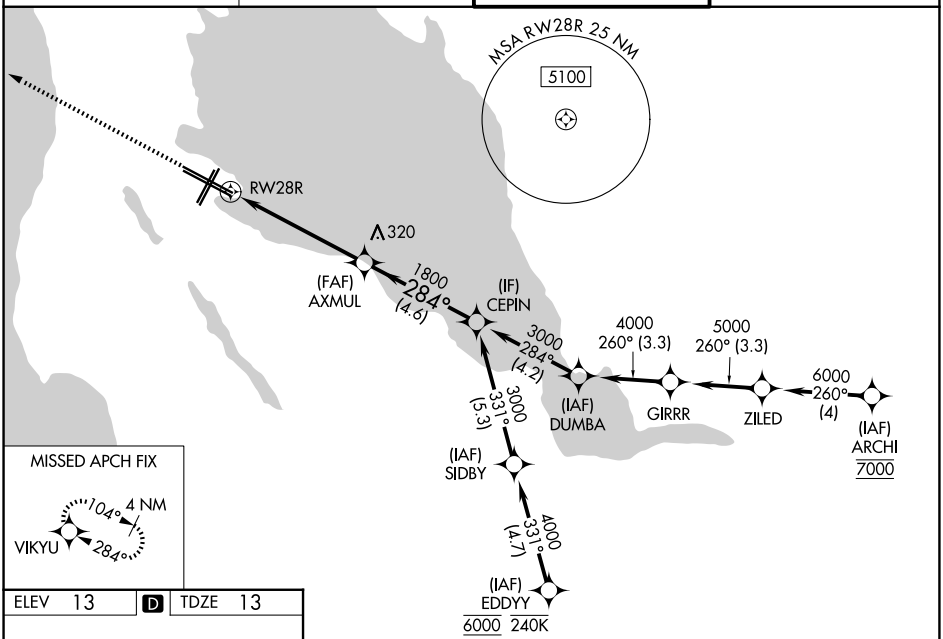

ELEV 13 D TDZE 13



TDZL/RCLS Rwys 19L and 28R
REIL Rwys 1L, 1R and 10L
HIRL all rwys

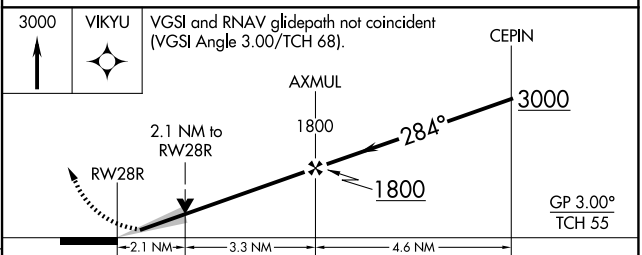

CATEGORY	A	B	C	D
LPV DA*	213/18 200 (200-½)			
LNAV/VNAV DA	642-1⅜ 629 (700-1⅜)			
LNAV MDA	760/24 747 (800-½)	760/40 747 (800-¾)	760-1¾ 747 (800-1¾)	
CIRCLING	760-1 747 (800-1)	1020-1½ 1007 (1100-1½)	1640-3 1627 (1700-3)	NA

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026