RNAV (RNP) Z RWY 20R

JOHN WAYNE/ORANGE COUNTY (SNA)

APP CRS	Rwy Ldg	5700
196°	TDZE	54
	Apt Elev	56


RNP AR APCH - GPS. Authorization required. From JWARD: min RNP 0.50. From KLEVR, RF, min RNP 0.70.

For uncompensated Baro-VNAV systems, procedure NA below 5°C or above 54°C.


MALSR

MISSED APPROACH: Climb to 3000 on track 196° to MINOE and hold, continue climb-in-hold.

D-ATIS	SOCAL APP CON	JOHN WAYNE TOWER★	GND CON	UNICOM
126.0	121.3 263.1	126.8 (CTAF) L 343.625	120.8	122.95

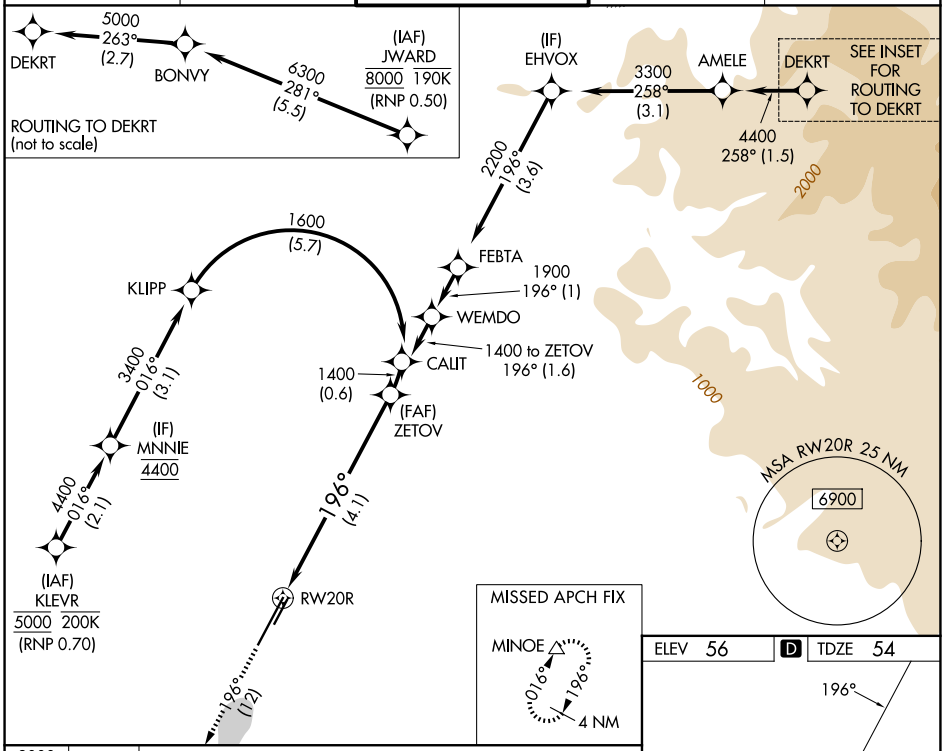

ELEV 56 D TDZE 54

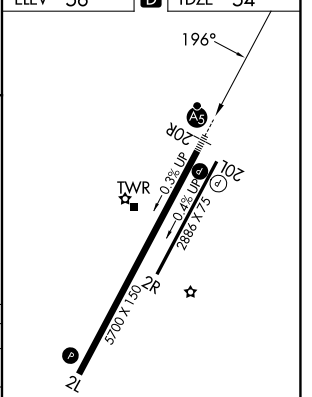


REIL Rwy 20L
HIRL Rwy 2L-20R
MIRL Rwy 2R-20L

3000	MINOE
tr 196°	△

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 68).

See planview for multiple IF locations.

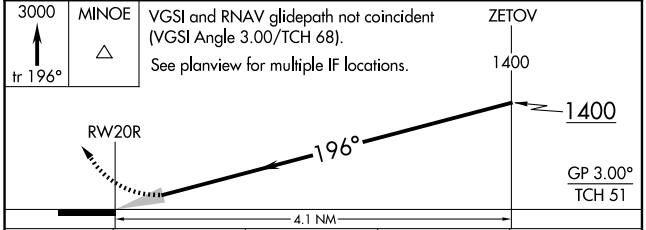

CATEGORY	A	B	C	D
RNP 0.11 DA		376/26	322 (400-½)	
RNP 0.15 DA		562/55	508 (600-1)	
RNP 0.30 DA		618-1¼	564 (600-1¼)	

AUTHORIZATION REQUIRED

SW-3, 29 OCT 2026 to 26 NOV 2026
SW-3, 29 OCT 2026 to 26 NOV 2026