WAAS CH 45515 W01A	APP CRS 006°	Rwy Ldg 7002 TDZE 39 Apt Elev 50

RNAV (GPS) RWY 1


SAVANNAH/HILTON HEAD INTL (SAV)

RNP APCH.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F).

MISSED APPROACH: Climb to 2500 direct SUTME and hold.

ATIS	SAVANNAH APP CON★	SAVANNAH TOWER★	GND CON	UNICOM
123.75	125.3 371.875	125.975 (CTAF) L 257.8	121.9 348.6	122.95

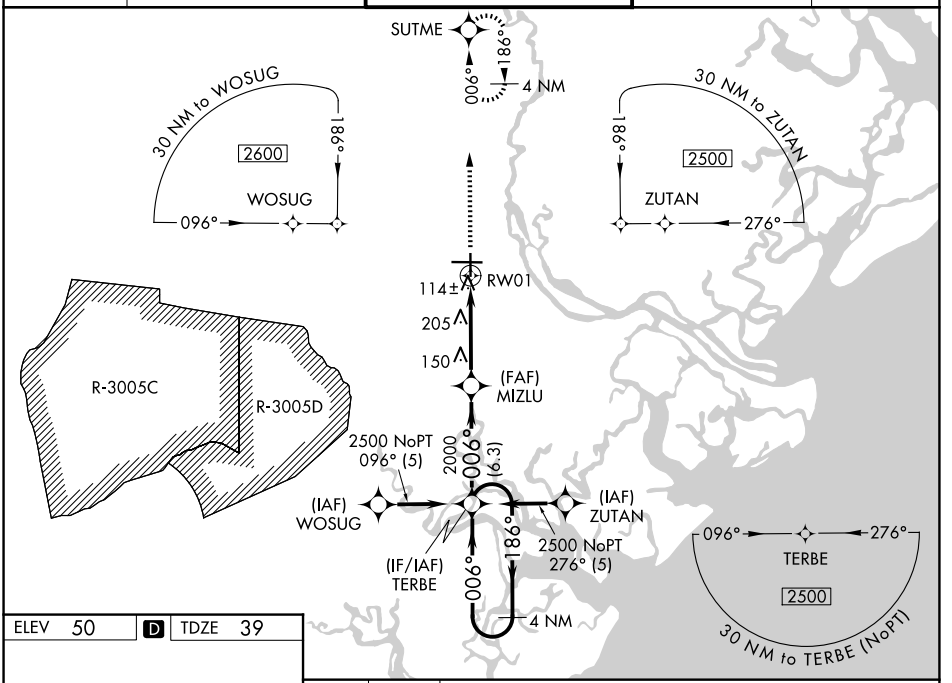


ELEV 50 D TDZE 39

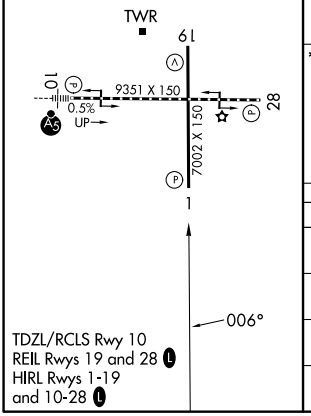

TDZL/RCLS Rwy 10
REIL Rwys 19 and 28 L
HIRL Rwys 1-19 and 10-28 L

2500 SUTME

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

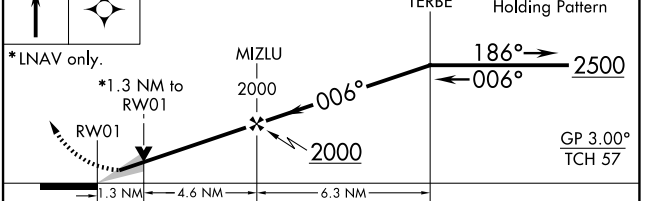

CATEGORY	A	B	C	D
LPV DA	239/40 200 (200-¾)			
LNAV/VNAV DA	384/60 345 (400-1¼)			
LNAV MDA	520/55 481 (500-1)		520-1⅜ 481 (500-1⅜)	
CIRCLING	520-1 470 (500-1)		740-2 690 (700-2)	740-2¼ 690 (700-2¼)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026