WAAS CH 90114 W10A	APP CRS 097°	Rwy Ldg 9351 TDZE 30 Apt Elev 50

RNAV (GPS) RWY 10

SAVANNAH/HILTON HEAD INTL (SAV)


RNP APCH-GPS.

For inop ALS increase LNAV/VNAV all Cats visibility to 1⅜ SM, increase LNAV Cat C/D to RVR 6000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Hilton Head Island altimeter setting and increase LPV DA to 296 feet and all visibilities to RVR 2000, increase LNAV/VNAV DA to 596 feet and all visibilities to 1¼ SM, increase all MDAs 80 feet and LNAV Cat C/D visibility to RVR 5000. For inop ALS when using Hilton Head Island altimeter setting, LNAV/VNAV all Cats visibility to 1⅝ SM, increase LNAV Cat C/D visibility to 1⅜ SM. VDP and Baro-VNAV NA when using Hilton Head Island altimeter setting.


MALSR


MISSED APPROACH: Climb to 2500 direct TELOE and hold.

ATIS	SAVANNAH APP CON★	SAVANNAH TOWER★	GND CON	UNICOM
123.75	125.3 371.875	125.975 (CTAF) L 257.8	121.9 348.6	122.95

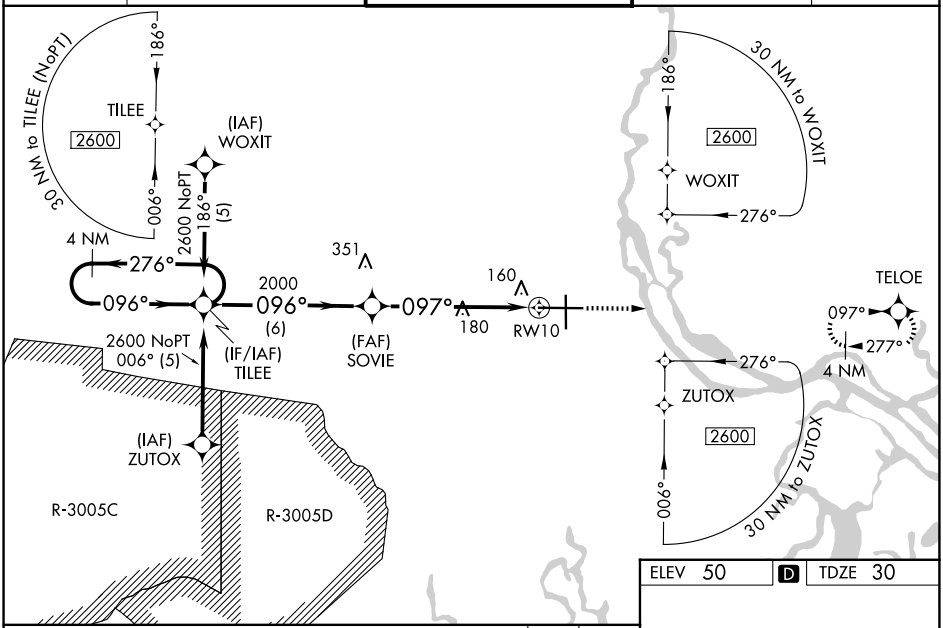

ELEV 50	D	TDZE 30

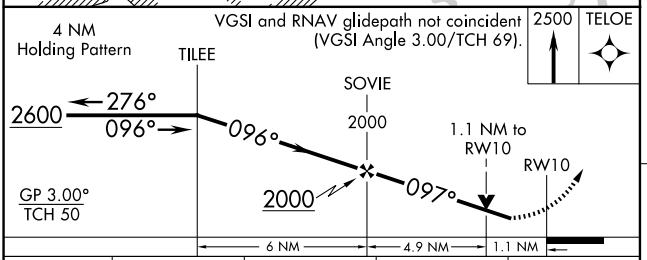



CATEGORY	A	B	C	D
LPV DA	230/18 200 (200-½)			
LNAV/VNAV DA	530/50 500 (500-1)			
LNAV MDA	440/24 410 (400-½)		440/40 410 (400-¾)	
CIRCLING	520-1 470 (500-1)		740-2 690 (700-2)	740-2¼ 690 (700-2¼)

TDZL/RCLS Rwy 10
REIL Rwys 19 and 28 L
HIRL Rwys 1-19 and 10-28 L

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026