RNAV (GPS) RWY 4

SCHENECTADY COUNTY (SCH)

WAAS CH 42722 W04A	APP CRS 040°	Rwy Ldg 7001	TDZE 338	Apt Elev 378


RNP APCH - GPS.


Circling Rwy 10 NA at night. Baro-VNAV and VDP NA when using Albany altimeter setting. Rwy 4 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Albany altimeter setting and increase LPV DA to 621 feet, LNAV/VNAV DA to 638 feet, and increase all MDAs 40 feet. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV Cats A/B to 1 SM and Cats C/D to 1⅜ SM. For inop ALS when using Albany altimeter setting, increase LPV all Cats visibility to ⅞ SM, increase LNAV/VNAV all Cats to ⅞ SM, increase LNAV Cats A/B visibility to 1 SM, and Cats C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct MULXI and hold.


AWOS-3	ALBANY APP CON	SCHENECTADY TOWER ★	GND CON	UNICOM
119.275	132.825 263.075	121.3 (CTAF) L 321.1	121.9	122.95

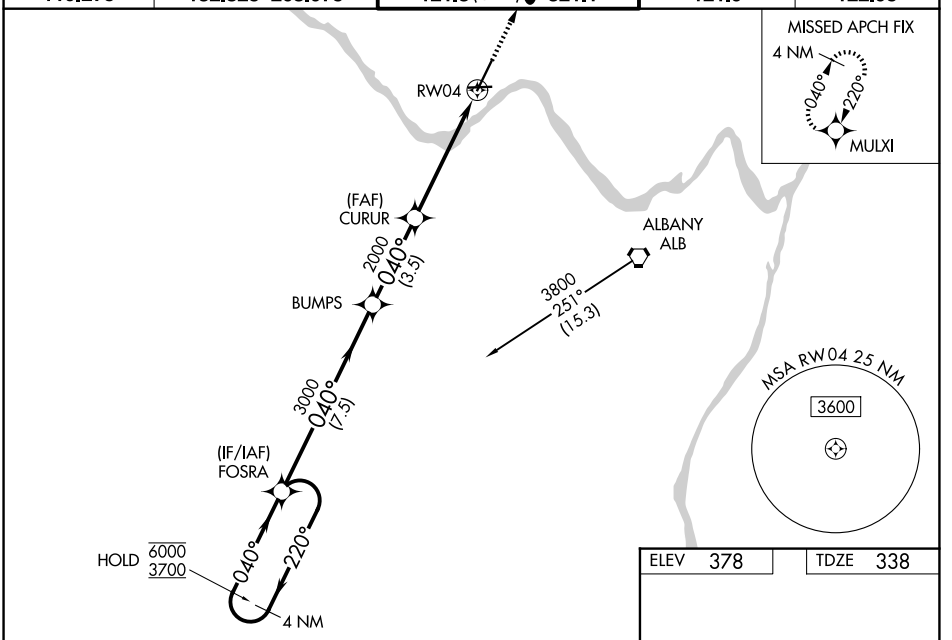

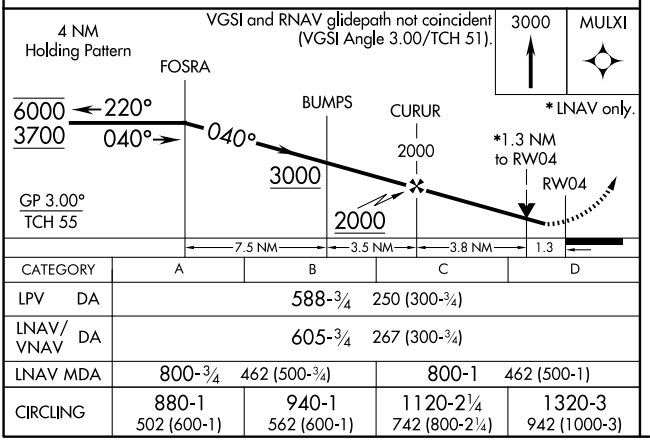

CATEGORY	A	B	C	D
LPV DA	588-¾	250 (300-¾)		
LNAV/VNAV DA	605-¾	267 (300-¾)		
LNAV MDA	800-¾	462 (500-¾)	800-1	462 (500-1)
CIRCLING	880-1	940-1	1120-2¼	1320-3
	502 (600-1)	562 (600-1)	742 (800-2¼)	942 (1000-3)

ELEV 378 TDZE 338

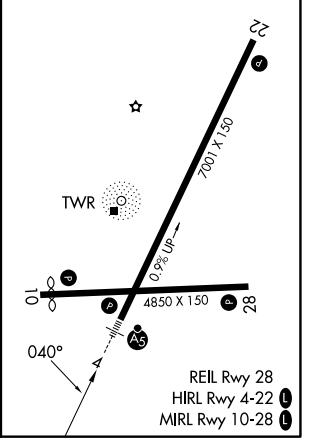

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026