RNAV (RNP) Z RWY 21

SPOKANE INTL (GEG)

APP CRS	Rwy Ldg	11002
212°	TDZE	2346
	Apt Elev	2385

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 43°C. For inop ALS increase RNP 0.11 visibility all Cats to ¾, RNP 0.15 visibility all Cats to 1⅛ and RNP 0.30 visibility all Cats to 1⅜ .

ALSF-2

MISSED APPROACH: Climb to 5000 on track 212° to IRUHO and on track 252° to GANGS and hold.
*Missed approach requires minimum climb of 310 feet per NM to 3000.

ATIS	SPOKANE APP CON	SPOKANE TOWER	GND CON
124.325 254.375	123.75 282.25 (205°-025°) 133.35 263.0 (026°-204°)	118.3 278.3	121.9 348.6

MISSED APCH FIX
GANGS
056°
236°
5 NM

Procedure NA for arrivals at JOMRU on V112 northbound.

(IAF) JOMRU
159° (10.9)
5000
(IF) CEBUS


MSA RW 21 25 NM
7200

JIVBO
210K until WAVIX
3500 (4.2)
OXOJO
3400 (3.4)
3700 212° (6.8)
3400 212° (2.1)
OPTIY
210K until WAVIX
JIXEG
(IF) WEGNE
4000 045° (7)
(FAF) WAVIX
3400 (3.8)
4500 295° (3.5)
5600 295° (2)
212° (3.2)
2362
4500 (3.5)
INVUW
(IF) CUMUR
5900 295° (2)
RW21
4500 045° (29.4)
ZUDSI
210K until WAVIX
CUFYE
6700 295° (5.1)
(IAF) ZOOMR (RF REQD)
Procedure NA for arrivals at ZOOMR on V2-448 southwest bound.
212° (10)
4600 012° (5.9)
(IAF) ROPES (RF REQD)
IRUHO
(IF) CAHLA
Procedure NA for arrivals at ROPES on V2 eastbound.
252° (9.8)
4600 005° (12.4)
(IAF) ATOXE (RF REQD)
Procedure NA for arrivals at ATOXE on V253 southeast bound.

5000 tr 212°	IRUHO	tr 252°	GANGS

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).


See planview for multiple IF locations.

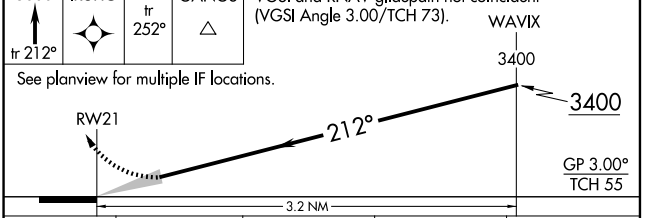

CATEGORY	A	B	C	D
RNP 0.11 DA*	2596/24	250 (300-½)		
RNP 0.15 DA	2699/30	353 (400-⅝)		
RNP 0.30 DA	2752/45	406 (400-⅞)		

AUTHORIZATION REQUIRED

ELEV 2385 D TDZE 2346



TDZL/RCLS Rwys 3 and 21
REIL Rwys 8 and 26
HIRL Rwy 3-21
MIRL Rwy 8-26

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026