RNAV (GPS) Y RWY 3

SPOKANE INTL (GEG)

WAAS	APP CRS	Rwy Ldg	11002
CH 81920	031°	TDZE	2385
W03A		Apt Elev	2385


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 53°C. For inop ALS increase LNAV/VNAV all Cats visibility to 1⅝ SM and increase LNAV Cats C and D visibility to 1¾ SM.


ALSF-2


MISSED APPROACH: Climb to 8200 direct LUCEV and hold, continue climb-in-hold to 8200.

ATIS	SPOKANE APP CON	SPOKANE TOWER	GND CON
124.325 254.375	123.75 282.25 (205°-025°) 133.35 263.0 (026°-204°)	118.3 278.3	121.9 348.6

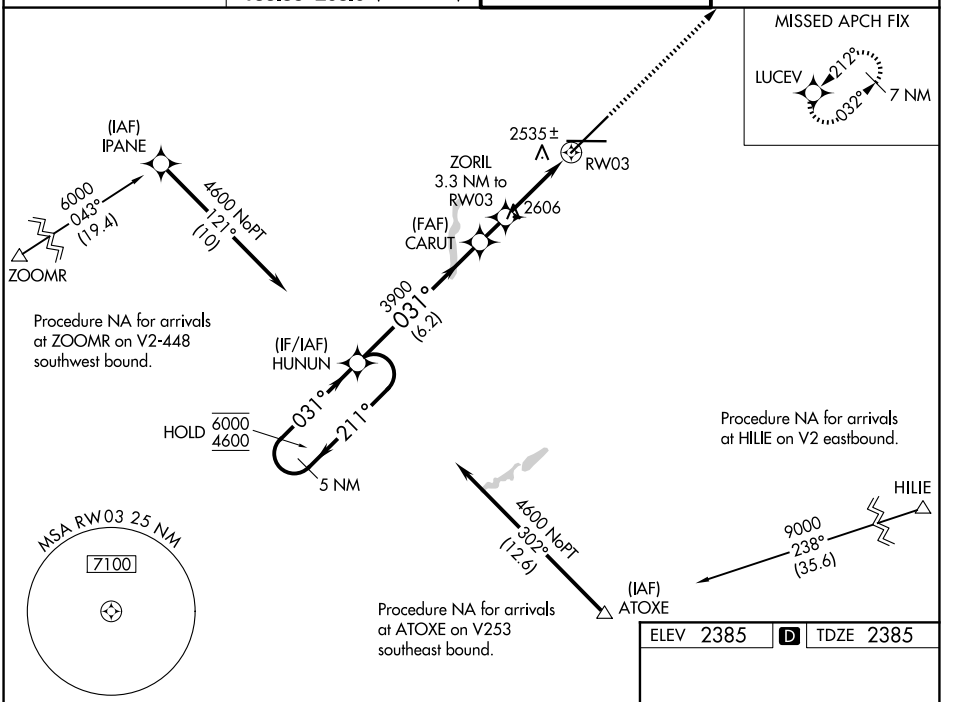

ELEV 2385 D TDZE 2385

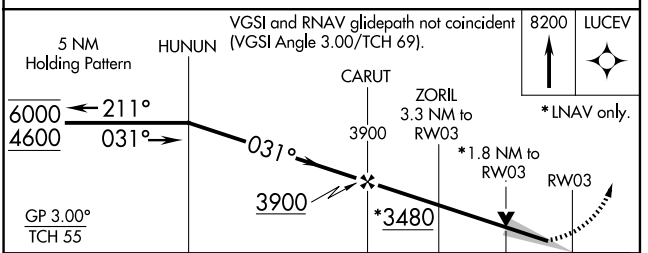



CATEGORY	A	B	C	D
LPV DA	2585/18	200 (200-½)		
LNAV/VNAV DA	2962-1½	577 (600-1½)		
LNAV MDA	3020/24	635 (700-½)	3020-1⅜ 635 (700-1⅜)	3020-1½ 635 (700-1½)

TDZL/RCLS Rwys 3 and 21
REIL Rwys 8 and 26
HIRL Rwy 3-21
MIRL Rwy 8-26

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026