LOC/DME I-MRZ	APP CRS	Rwy Ldg	9013
109.9	100°	TDZE	421
Chan 36		Apt Elev	421

ILS or LOC RWY 10

SYRACUSE HANCOCK INTL (SYR)


DME or RADAR required.


▼ TANUE fix minimums, for inoperative ALS, increase S-LOC 10
▲ Cats C and D visibility to RVR 5500.
**RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 3000 on heading 081° and on SYR VORTAC R-111 to STODA INT/ SYR VORTAC 15.5 DME/RADAR and hold.

ATIS	SYRACUSE APP CON	SYRACUSE TOWER	GND CON
124.225	126.125 269.125	120.3 239.0	121.7 348.6

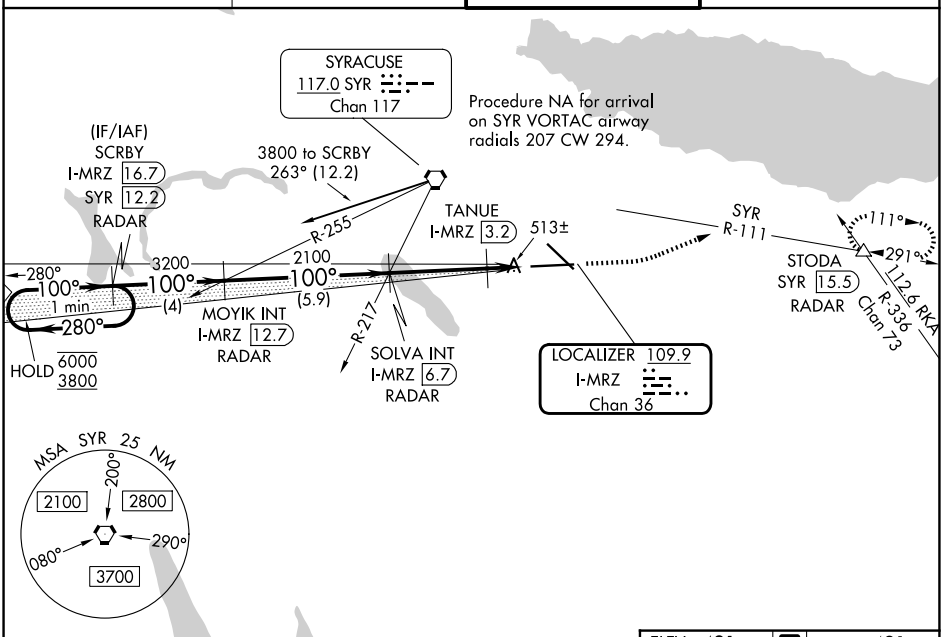

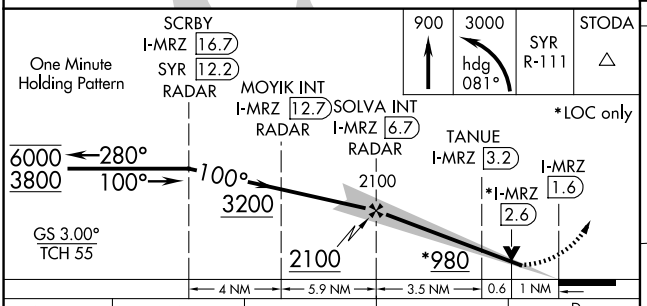



CATEGORY	A	B	C	D
S-ILS 10**	621/24	200 (200-½)		
S-LOC 10	980/24	559 (600-½)	980/60	559 (600-1¼)
CIRCLING	980-1	559 (600-1)	1020-1⅝	1180-2½
			599 (600-1⅝)	759 (800-2½)
TANUE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10	780/24	359 (400-½)	780/30	359 (400-⅝)
CIRCLING	900-1	920-1	1020-1½	1180-2½
	479 (500-1)	499 (500-1)	599 (600-1½)	759 (800-2½)

TDZ/CL Rwy 28
HIRL Rwys 10-28 and 15-33

FAF to MAP 5.1 NM					
Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026