
LGTNG FIVE DEPARTURE


TAMPA DEP CON
118.8 239.3
D-ATIS DEP
128.475
CLNC DEL
133.6
GND CON
121.7 269.4
TAMPA TOWER
119.5 269.4


RADAR required.

TOP ALTITUDE: 6000

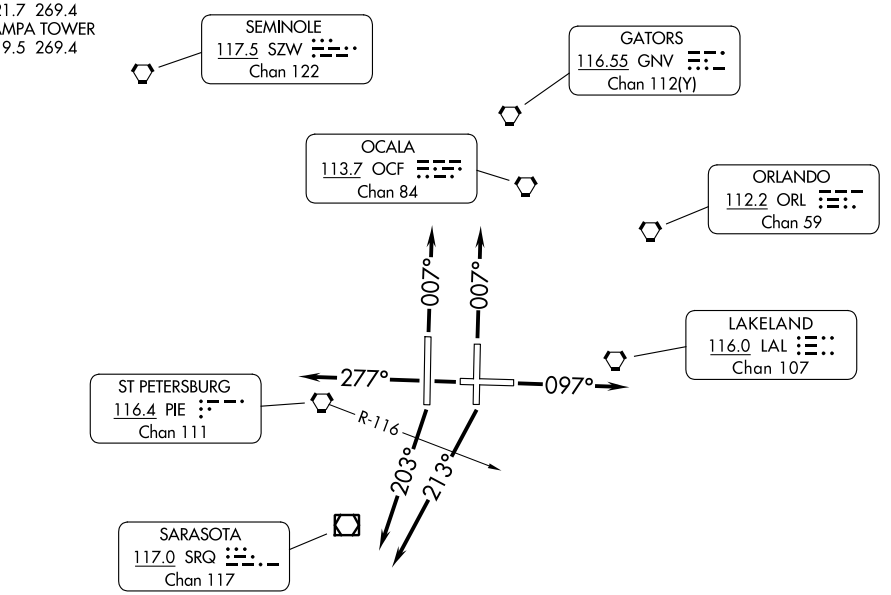

NOTE: Turbojets only.





TAKEOFF MINIMUMS
Rwys 1L/R, 19R, 28: Standard.
Rwy 10: Standard with minimum climb of 245'/NM to 900.
Rwy 19L: 300-1½ or standard with minimum climb of 225'/NM to 300, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1600' prior to departure end of runway.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on heading 007°, thence. . .
TAKEOFF RUNWAY 10: Climb on heading 097°, thence. . .
TAKEOFF RUNWAY 19L: Climb on heading 213°, thence. . .
TAKEOFF RUNWAY 19R: Climb on heading 203°, thence. . .
TAKEOFF RUNWAY 28: Climb on heading 277°, thence. . .

. . .expect RADAR vectors to join filed/assigned route. Maintain 6000, expect filed altitude 10 minutes after departure.

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026