RNAV (GPS) RWY 19R

TAMPA INTL (TPA)

WAAS	APP CRS	Rwy Ldg	11002
CH 40406	187°	TDZE	21
W19B		Apt Elev	26


RNP APCH - GPS.


T A LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. For inop ALS, increase LPV visibility Cat E to RVR 4000, LNAV/VNAV visibility all Cats to RVR 6000, and LNAV visibility Cat C/D/E to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR (A5)


MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct JACKT and hold.

D-ATIS	TAMPA APP CON	TAMPA TOWER	GND CON
126.45	118.5 307.175	119.5 269.4	121.7 269.4

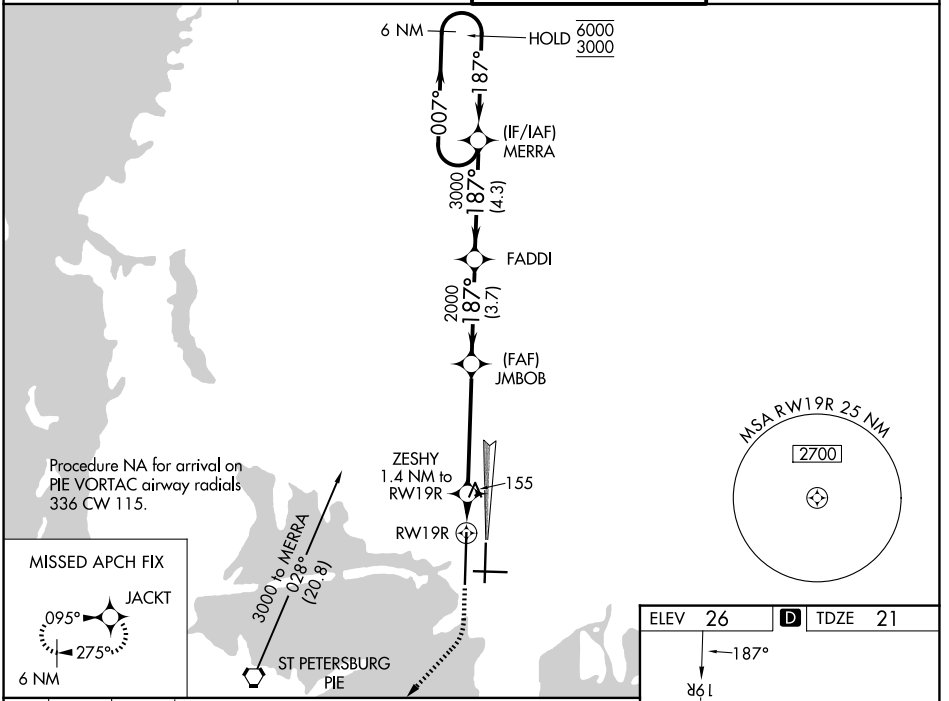

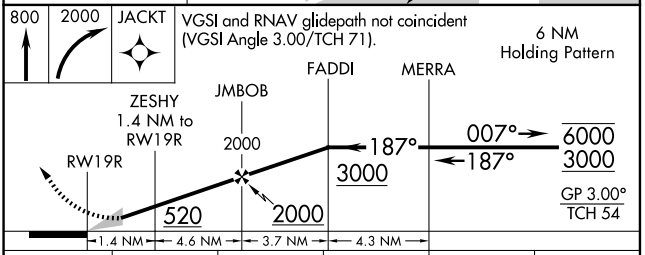

CATEGORY	A	B	C	D	E
LPV DA*	221/24 200 (200-½)				
LNAV/VNAV DA	440/40 419 (500-¾)				
LNAV MDA	440/24 419 (500-½)		440/40 419 (500-¾)		
CIRCLING	600-1 574 (600-1)		680-1¾ 654 (700-1¾)	980-3 954 (1000-3)	

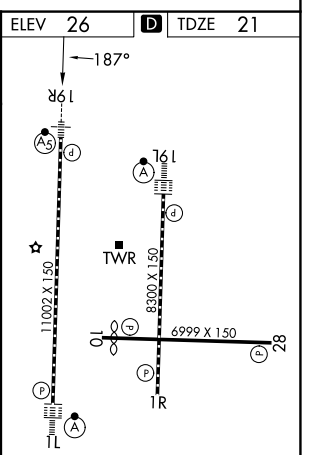

REIL Rwy 1R
HIRL Rwys 1L-19R, 1R-19L, and 10-28
TDZL/RCLS Rwys 1L and 19L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026