RNAV (GPS) Y RWY 1R

TAMPA INTL (TPA)


WAAS CH 87105 W01B	APP CRS 007°	Rwy Ldg 8300 / TDZE 21 / Apt Elev 26

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C or above 54°C. Simultaneous approach authorized with Rwy 1L. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.


MISSED APPROACH: Climb to 2000 direct COBOX and hold.

D-ATIS	TAMPA APP CON	TAMPA TOWER	GND CON
126.45	118.5 307.175	119.5 269.4	121.7 269.4

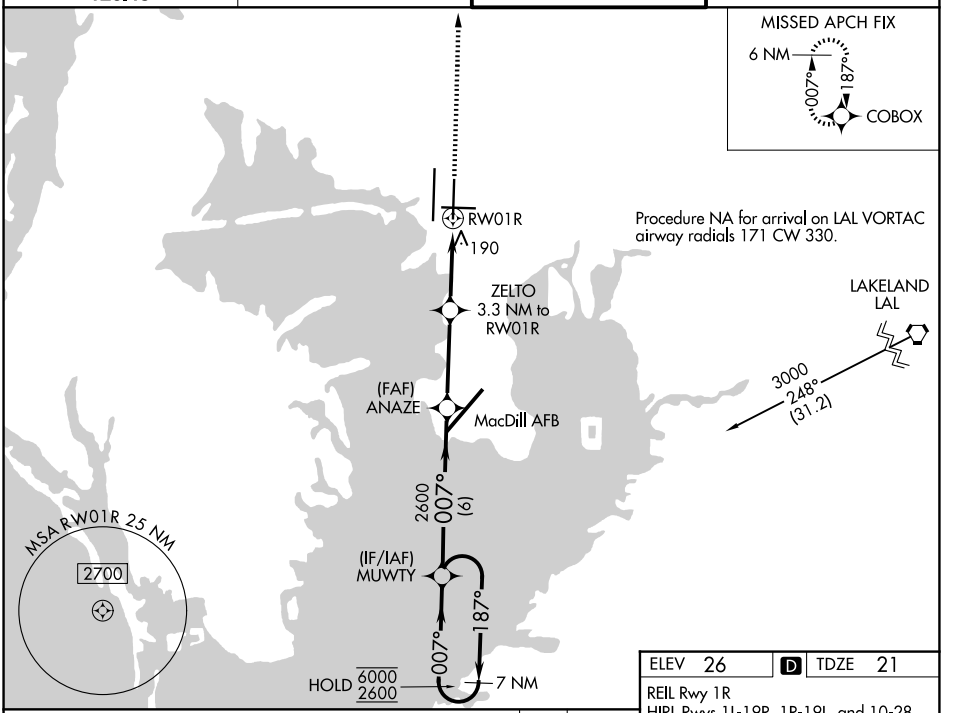

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).


2000 COBOX

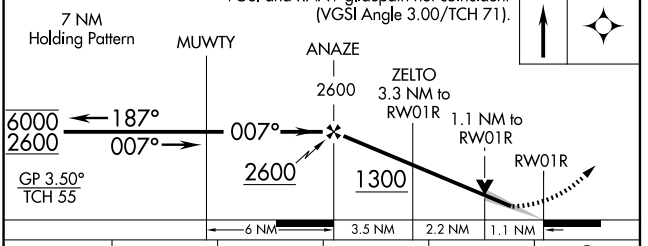

CATEGORY	A	B	C	D	E
LPV DA	291/45	270 (300-⅞)		NA	
LNAV/VNAV DA	440/60	419 (500-1¼)		NA	
LNAV MDA	440/55	419 (500-1)	440/60	419 (500-1¼)	
CIRCLING	600-1	574 (600-1)	680-1¾ 654 (700-1¾)	980-3	954 (1000-3)

ELEV 26 | D | TDZE 21

REIL Rwy 1R
HIRL Rwys 1L-19R, 1R-19L, and 10-28
TDZL/RCLS Rwys 1L and 19L

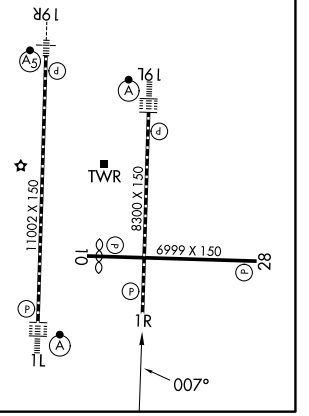

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026