

TAMPA NINE DEPARTURE

TAMPA DEP CON
134.25 279.6
D-ATIS DEP
128.475
CLNC DEL
133.6
GND CON
121.7 269.4
TAMPA TOWER
119.5 269.4


RADAR required.

TOP ALTITUDE: 3000

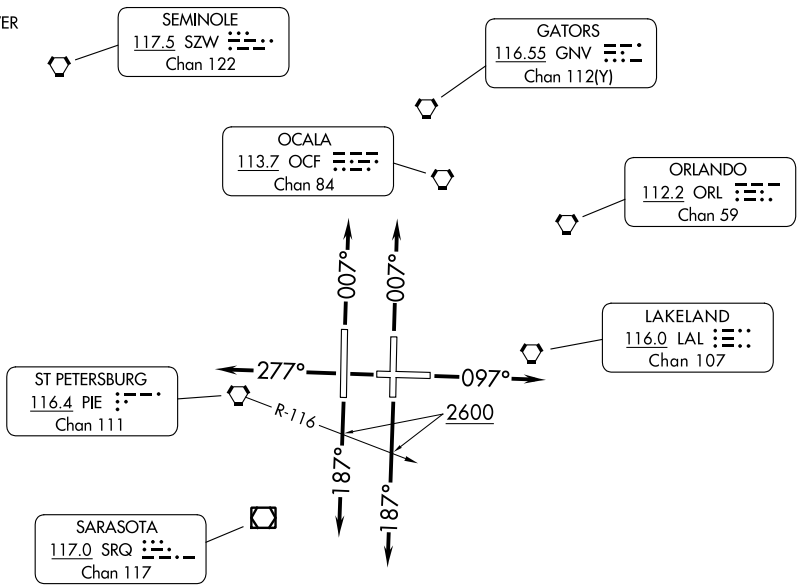



NOTE: Turboprops/Props only.



TAKEOFF MINIMUMS
Rwys 1L/R, 19R, 28: Standard.
Rwy 10: Standard with minimum climb of 245'/NM to 900.
Rwy 19L: 300-1½ or standard with minimum climb of 225'/NM to 300, or alternatively, with standard takeoff minimums and a normal 200'/NM climb gradient, takeoff must occur no later than 1600' prior to departure end of runway.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 1L/R: Climb on heading 007°, thence. . .
TAKEOFF RUNWAY 10: Climb on heading 097°, thence. . .
TAKEOFF RUNWAYS 19L/R: Climb on heading 187° to cross PIE R-116 at or above 2600, thence. . .
TAKEOFF RUNWAY 28: Climb on heading 277°, thence. . .

. . .expect RADAR vectors to join filed/assigned route. Maintain 3000, expect filed altitude 10 minutes after departure.

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026