LOC I-TVC	APP CRS	Rwy Ldg	7016
110.7	279°	TDZE	616
		Apt Elev	624

ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

RNP APCH - GPS.

Aircraft not GPS equipped - RADAR required for procedure entry.


S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.

-21°C


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.

ATIS	MINNEAPOLIS CENTER	TRAVERSE CITY TOWER ★	GND CON	UNICOM
119.175	132.9 338.3	124.2 (CTAF) L 348.6	121.8 348.6	122.95

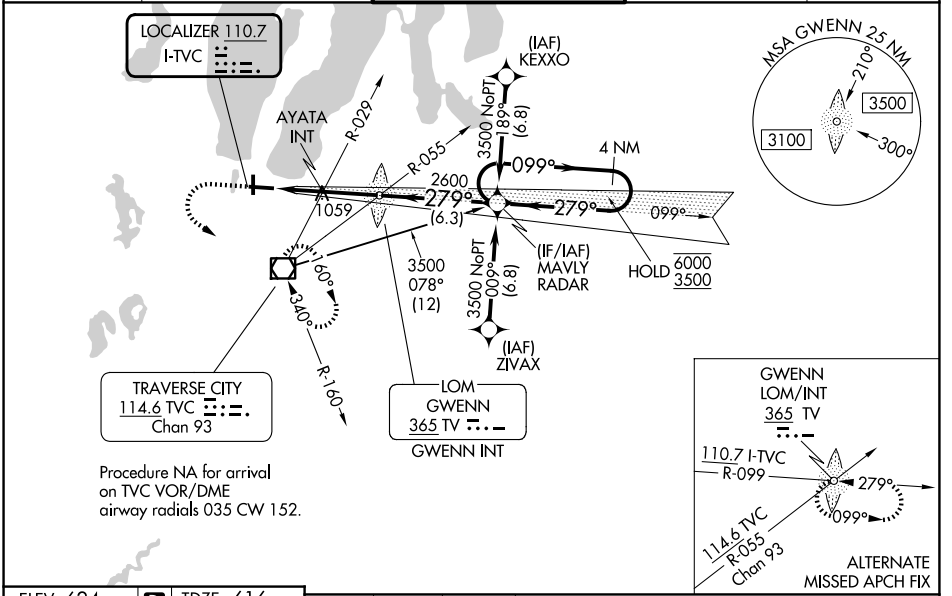


ELEV 624 D TDZE 616



HIRL Rwy 10-28 L
MIRL Rwy 18-36 L

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

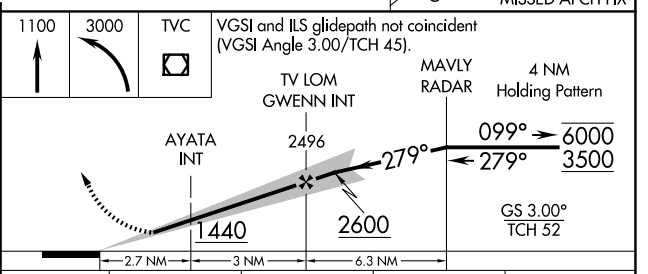

CATEGORY	A	B	C	D
S-ILS 28	816-½ 200 (200-½)			
S-LOC 28	1440-½ 824 (900-½)	1440-¾ 824 (900-¾)	1440-1⅞	824 (900-1⅞)
CIRCLING	1440-1¼	816 (900-1¼)	1440-2½ 816 (900-2½)	1720-3 1096 (1100-3)
AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 28	1320-½	704 (700-½)	1320-1⅝	704 (700-1⅝)
CIRCLING	1320-1	696 (700-1)	1420-2¼ 796 (800-2¼)	1720-3 1096 (1100-3)

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026