RNAV (GPS) RWY 13

VICTORIA RGNL (VCT)

WAAS CH 86245 W13A	APP CRS 128°	Rwy Ldg 9111 TDZE 115 Apt Elev 115

RNP APCH-GPS.


T A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat E visibility to 1 SM.


MALSR


MISSED APPROACH: Climb to 2200 direct SEYOG and hold.

ATIS	HOUSTON CENTER	VICTORIA TOWER ★	GND CON	UNICOM
119.025	135.05 353.6	126.075 (CTAF) L 257.95	120.525 239.25	122.7

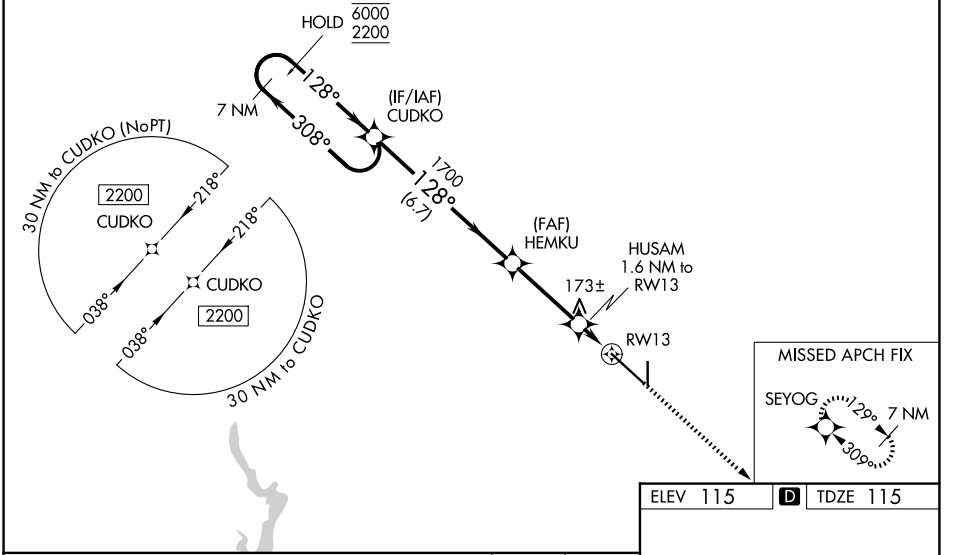

ELEV 115 D TDZE 115

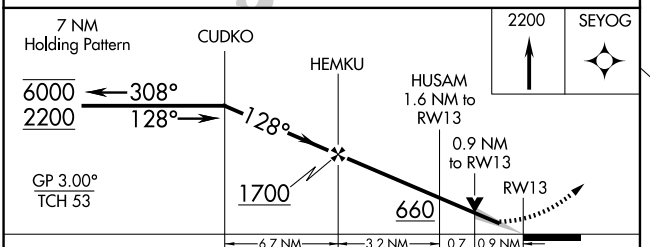



CATEGORY	A	B	C	D	E
LPV DA	315-½ 200 (200-½)				
LNAV/VNAV DA	365-½ 250 (300-½)				
LNAV MDA	440-½ 325 (400-½)				
CIRCLING	580-1 465 (500-1)		820-2 705 (800-2)	880-2½ 765 (800-2½)	NA

MIRL Rwy 18-36
REIL Rwy 18 and 36
HIRL Rwy 13-31 L

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026