VOR RWY 20

WALLA WALLA RGNL (ALW)

VOR/DME ALW	APP CRS	Rwy Ldg	6527
116.4	203°	TDZE	1194
Chan 111		Apt Elev	1194


ADF required.

NA For inop ALS, increase JOSBO fix minimums S-20 Cats C/D visibility to 1⅝ SM.


MALSR


MISSED APPROACH: Climb to 2300 then climbing right turn to 5100 direct TRINA LOM/ALW 6.7 DME and hold, continue climb-in-hold to 5100.

ASOS	SPOKANE APP CON★	WALLA WALLA TOWER★	GND CON	UNICOM
135.875	133.15 379.15	118.5 (CTAF) L 289.4	121.6 289.4	122.95

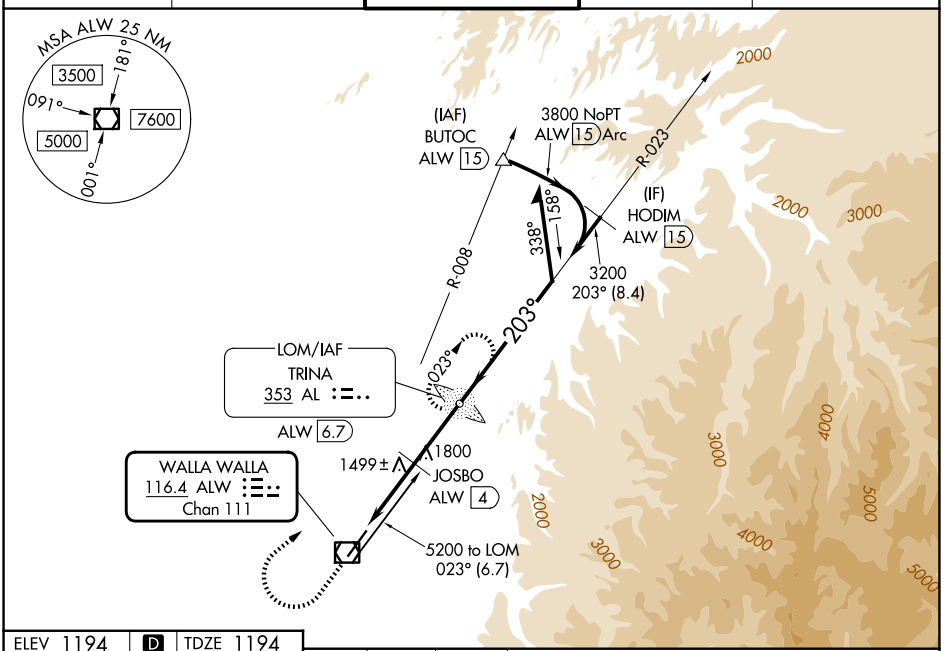

ELEV 1194 D TDZE 1194

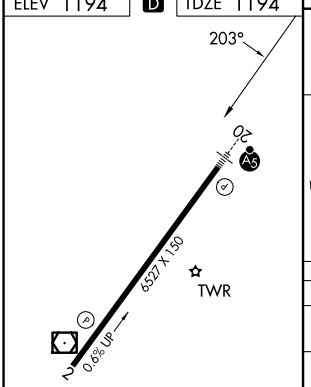

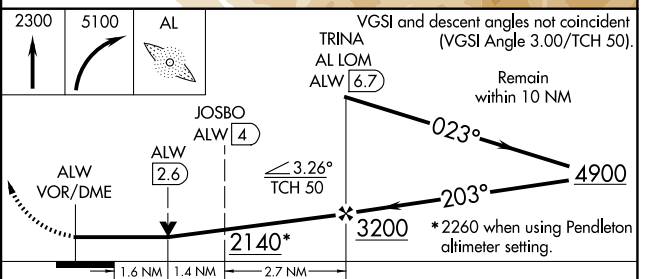

CATEGORY	A	B	C	D
S-20	2140/40 946 (1000-¾)		2140-2 946 (1000-2)	
CIRCLING	2140-1¼ 946 (1000-1¼)		2140-2¾ 946 (1000-2¾)	2300-3 1106 (1200-3)
JOSBO FIX MINIMUMS (DME REQUIRED)				
S-20	1760/24 566 (600-½)		1760-1¼ 566 (600-1¼)	
CIRCLING	1760-1 566 (600-1)	1820-1 626 (700-1)	2120-2¾ 926 (1000-2¾)	2300-3 1106 (1200-3)

REIL Rwy 2 L
HIRL Rwy 2-20 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026