WAAS CH 65815 W01A | APP CRS 015° | Rwy Ldg 7012 TDZE 76 Apt Elev 80


RNAV (GPS) RWY 1
NEW CASTLE (ILG)


Inoperative table does not apply to LPV all Cats and LNAV Cats A and B. Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 380, LNAV/VNAV DA to 579, and all MDAs 60 feet; increase LNAV/VNAV all Cats visibility to RVR 6000 and Circling Cat D visibility ¼ SM. For inoperative MALSR, increase LNAV Cats C and D visibility ¼ mile. For inoperative MALSR, when using Philadelphia Intl altimeter setting, increase LNAV visibility Cat C ¼ mile.

MALSR

MISSED APPROACH: Climb to 2000 direct CUBBE and left turn via track 265° to TENPY and via track 214°to ELUDE and hold.

ATIS	PHILADELPHIA APP CON	WILMINGTON TOWER★	GND CON	UNICOM
123.95	118.35 323.1	126.0 L (CTAF) 352.05	121.7 275.8	122.95

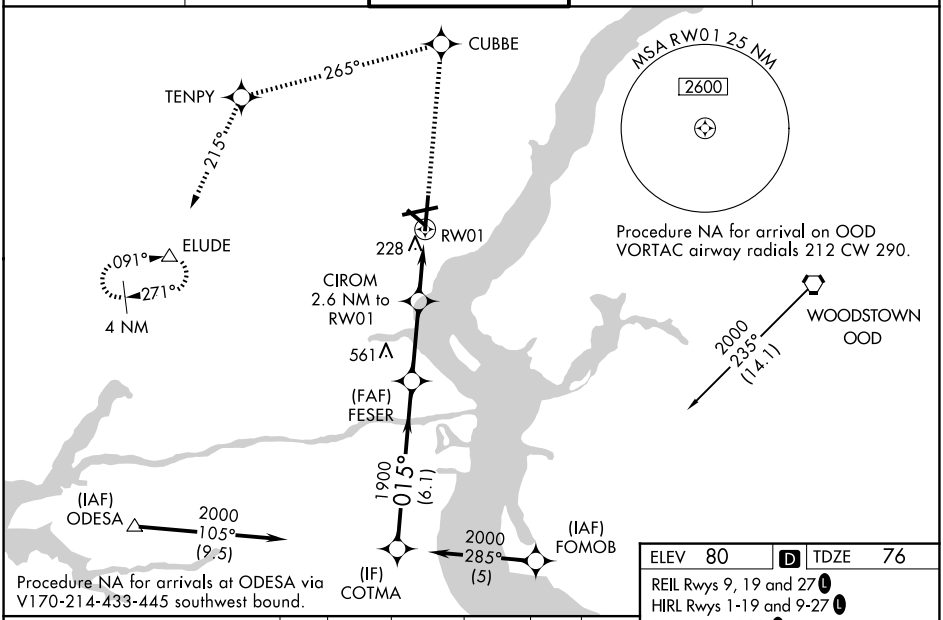


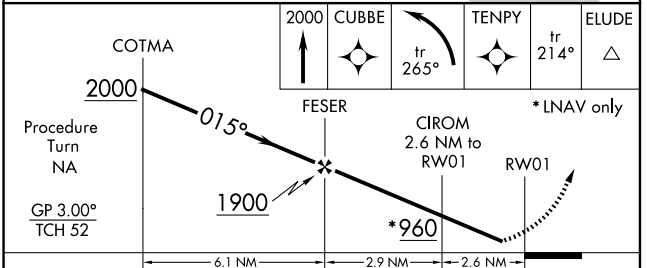

CATEGORY	A	B	C	D
LPV DA	326/50 250 (300-1)			
LNAV/VNAV DA	525/50 449 (500-1)			
LNAV MDA	480/50 404 (400-1)			
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1½ 520 (600-1½)	800-2¼ 720 (800-2¼)

ELEV 80 | D | TDZE 76

REIL Rwys 9, 19 and 27 L
HIRL Rwys 1-19 and 9-27 L
MIRL Rwy 14-32 L

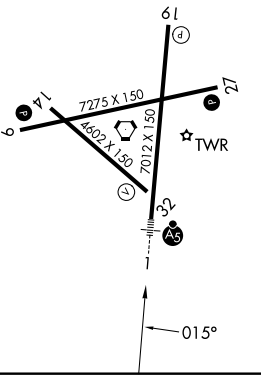

NE-3, 29 OCT 2026 to 26 NOV 2026