ILS Y or LOC RWY 35

WILMINGTON INTL (ILM)

LOC I-ILM	APP CRS	Rwy Ldg 7204
110.3	349°	TDZE 31
		Apt Elev 32


ADF required. RADAR required for procedure entry.


For inop ALS, increase S-LOC 35 Cat C/D visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 600 then climbing left turn to 1800 direct AIRLI LOM and hold.


ATIS	WILMINGTON APP CON★	WILMINGTON TOWER★	GND CON	UNICOM
124.975	118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	119.9 (CTAF) L 239.3	121.9 348.6	122.95

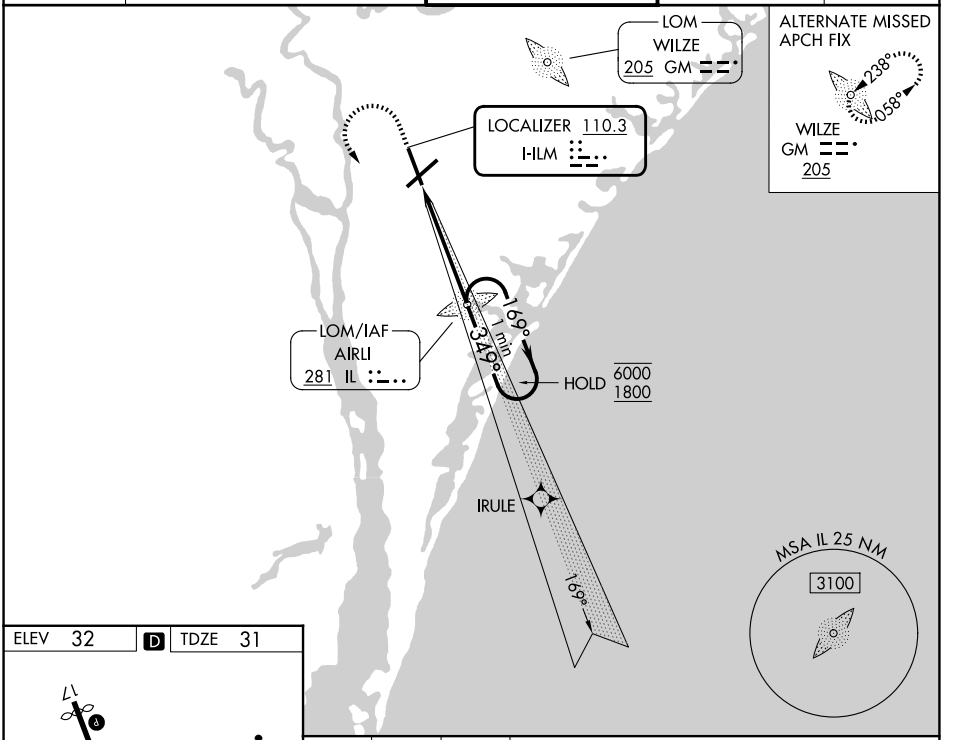

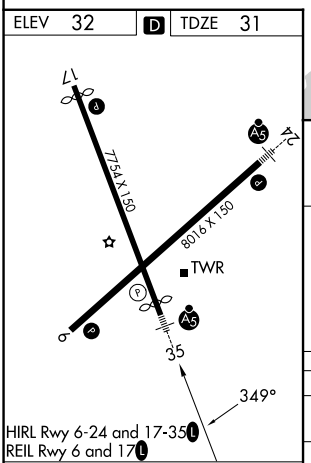

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:38	3:06	2:19	1:51	1:33

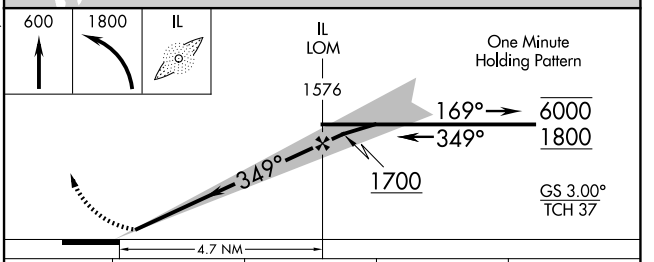

CATEGORY	A	B	C	D
S-ILS 35	242/24 211 (300-½)			
S-LOC 35	500/24 469 (500-½)		500/50 469 (500-1)	
CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)	920-3 888 (900-3)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026