RNAV (GPS) RWY 35

WILMINGTON INTL (ILM)


WAAS	APP CRS	Rwy Ldg	7204
CH 50499	349°	TDZE	31
W35A		Apt Elev	32

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C (20°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ SM.


MALSR


MISSED APPROACH: Climb to 3000 direct ILUXY and hold.

ATIS	WILMINGTON APP CON★	WILMINGTON TOWER★	GND CON	UNICOM
124.975	118.25 284.65 (164°-343°) 135.75 317.425 (344°-163°)	119.9 (CTAF) L 239.3	121.9 348.6	122.95

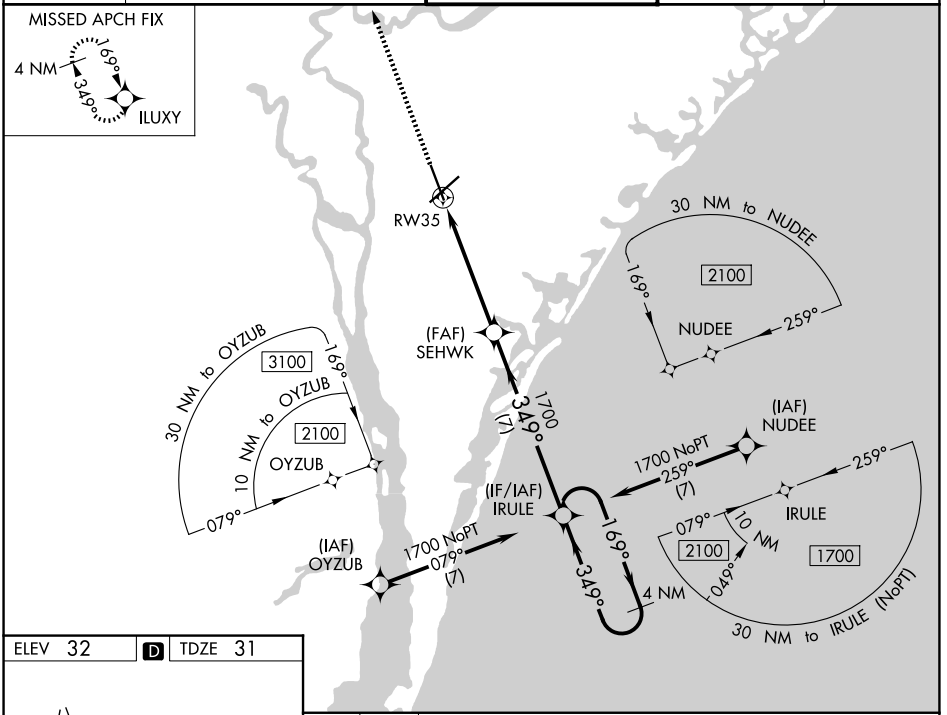

ELEV 32 D TDZE 31

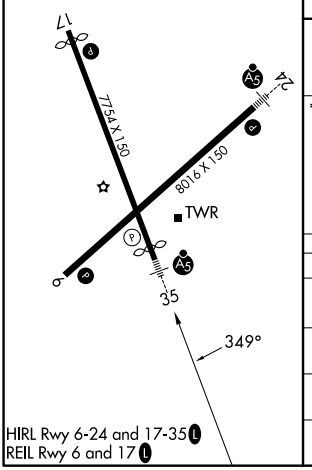

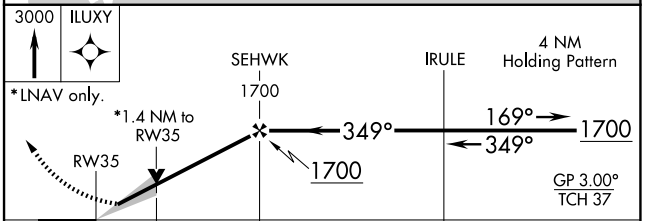

CATEGORY	A	B	C	D
LPV DA	242/24 211 (300-½)			
LNAV/VNAV DA	426/45 395 (400-⅞)			
LNAV MDA	500/24 469 (500-½)		500/50 469 (500-1)	
CIRCLING	560-1 528 (600-1)		720-2 688 (700-2)	920-3 888 (900-3)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026