WAAS CH 78144 W05A	APP CRS 053°	Rwy Ldg 7543 TDZE 716 Apt Elev 716

RNAV (GPS) RWY 5
WILLOW RUN (YIP)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000, LNAV Cats C/D visibility to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct SVM VORTAC and hold.

ATIS	DETROIT APP CON	WILLOW RUN TOWER	GND CON
127.425	118.95 284.0	125.275 256.9	119.975

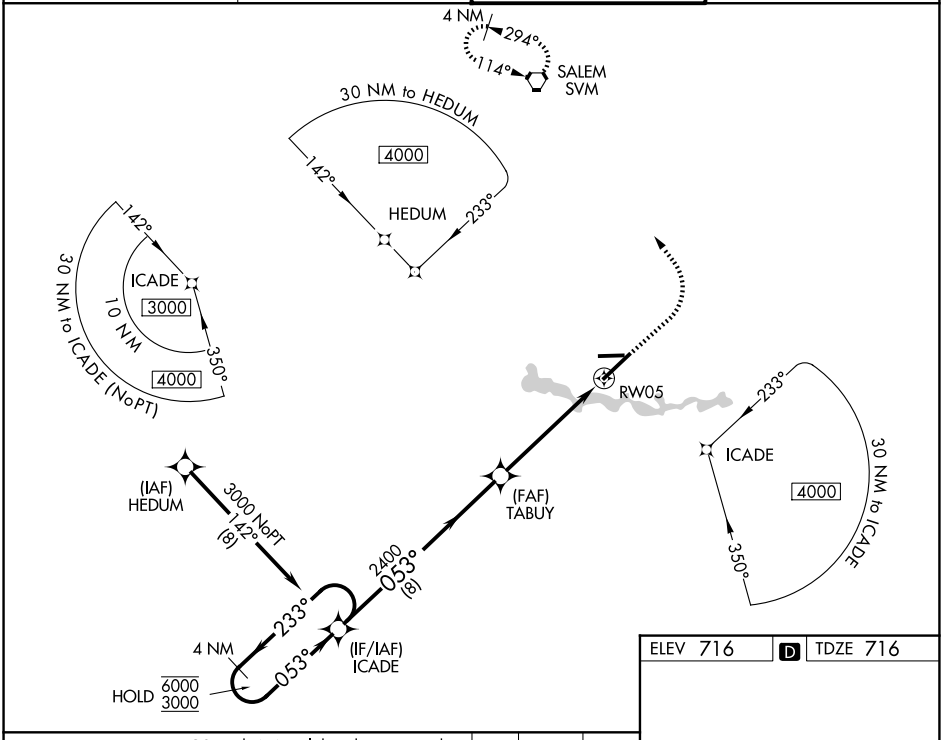


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

1200 3000 SVM

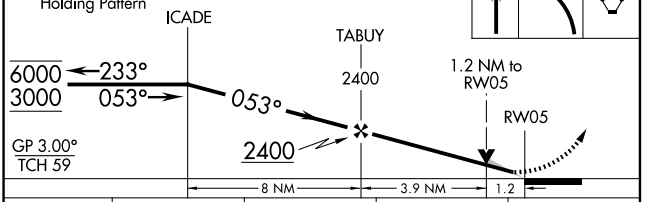

CATEGORY	A	B	C	D
LPV DA	916/18 200 (200-½)			
LNAV/VNAV DA	1121/40 405 (500-¾)			
LNAV MDA	1200/24 484 (500-½)		1200/50 484 (500-1)	
CIRCLING	1220-1 504 (600-1)		1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)

ELEV 716 D TDZE 716



TDZ/CL Rwy 5
HIRL Rwy 5-23
MIRL Rwy 9-27

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026