APP CRS	Rwy Ldg	7110
211°	TDZE	404
	Apt Elev	410

RNAV (RNP) Z RWY 21R


TRI-CITIES (PSC)

For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 54°C (130°F). GPS required. RF required. For inoperative MALSR, increase RNP 0.11 all Cats visibility to RVR 5700 and RNP 0.30 all Cats visibility to 1⅜ mile.

MALSR


MISSED APPROACH: Climb to 5200 on track 211° to KARTE, right turn to DAMSE, and on track 332° to PAIDS and hold.

ATIS	SPOKANE APP CON ★	TRI-CITIES TOWER ★	GND CON	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 285.55	121.8	122.95

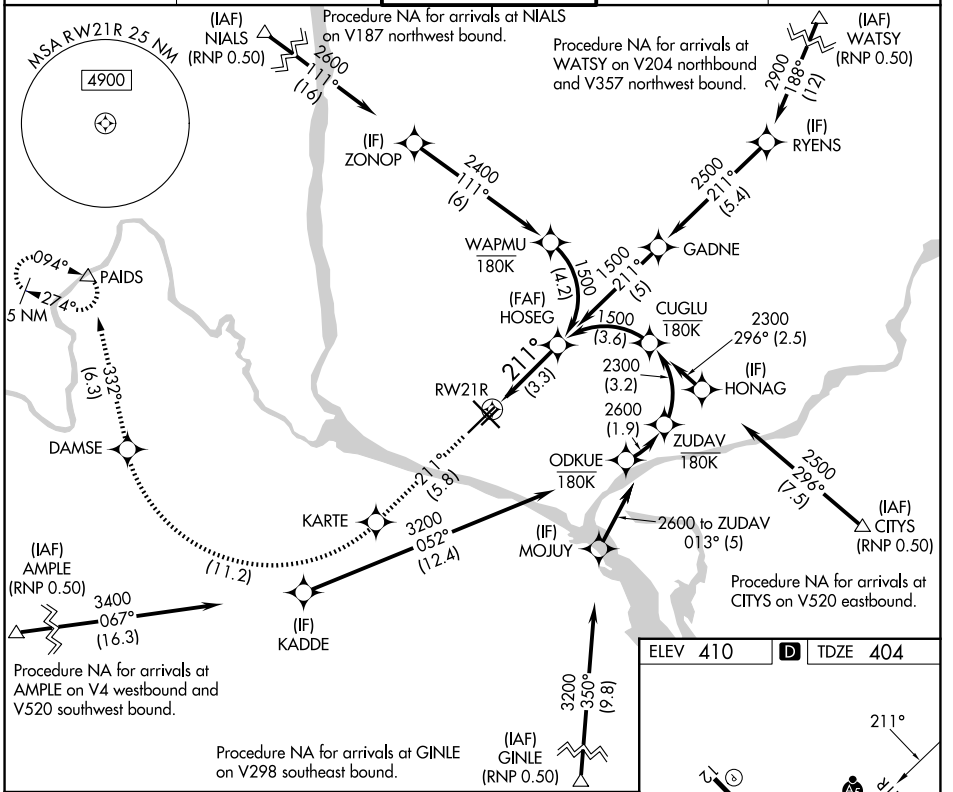

5200 tr 211°	KARTE		DAMSE	tr 332°	PAIDS


See planview for multiple IF locations.

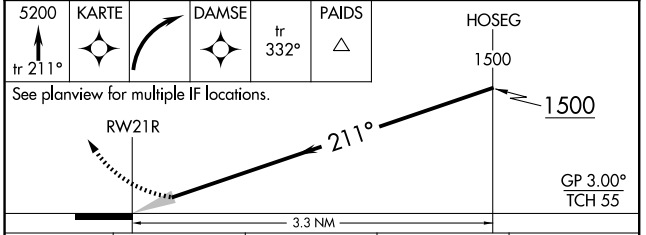

CATEGORY	A	B	C	D
RNP 0.11 DA		754/33	350 (400-⅝)	
RNP 0.30 DA		832/48	428 (500-1)	

AUTHORIZATION REQUIRED

ELEV 410 D TDZE 404



REIL Rwys 3L and 12 L
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026