WAAS CH 40303 W21A	APP CRS 211°	Rwy Ldg 7110 TDZE 404 Apt Elev 410

RNAV (GPS) Y RWY 21R


TRI-CITIES (PSC)


T A Baro-VNAV NA when using Hermiston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with Hermiston altimeter setting. When local altimeter setting not received, use Hermiston altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase LNAV/VNAV all Cats visibility ⅜ mile; LNAV Cat C and D visibility ⅜ mile and Circling Cat C and D visibility ¼ mile.
RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hermiston altimeter setting.


MALSR

MISSED APPROACH: Climb to 1100 then climbing right turn to 5200 direct PAIDS and hold, continue climb-in-hold to 5200.

ATIS	SPOKANE APP CON ★	TRI-CITIES TOWER ★	GND CON	UNICOM
125.65	128.75 377.2	135.3 (CTAF) L 285.55	121.8	122.95

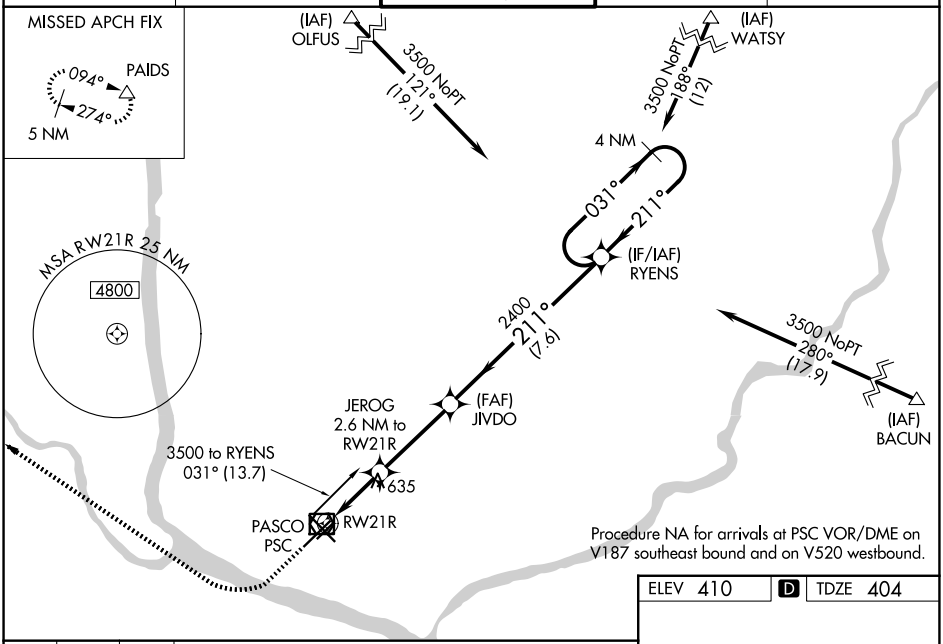

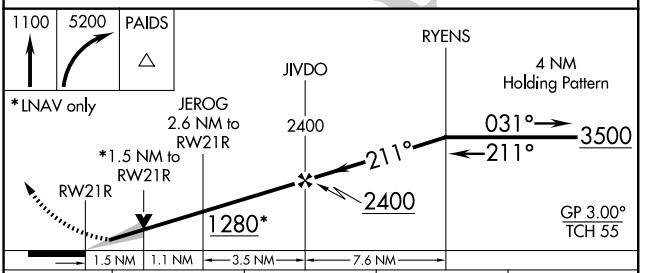



CATEGORY	A	B	C	D
LPV DA#	604/24 200 (200-½)			
LNAV/VNAV DA	844/51 440 (500-1)			
LNAV MDA	940/24 536 (600-½)		940/55 536 (600-1)	
CIRCLING	940-1 530 (600-1)		1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

REIL Rwys 3L and 12 L
MIRL Rwy 12-30 L
HIRL Rwy 3L-21R L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026