WAAS	APP CRS	Rwy Ldg	6001
CH 50300	122°	TDZE	74
W12A		Apt Elev	79

RNAV (GPS) RWY 12


DELAND MUNI-SIDNEY H TAYLOR FLD (DED)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Daytona Beach Intl altimeter setting. Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Daytona Beach Intl altimeter setting increase all DA/MDA 40 feet, increase LNAV/VNAV visibility ¼ SM all Cats.

MISSED APPROACH: Climb to 2000 direct CUGAK then on track 139° to OAKIE and hold.


AWOS-3	DAYTONA APP CON	UNICOM
119.575	125.35 322.3	123.075 (CTAF) L

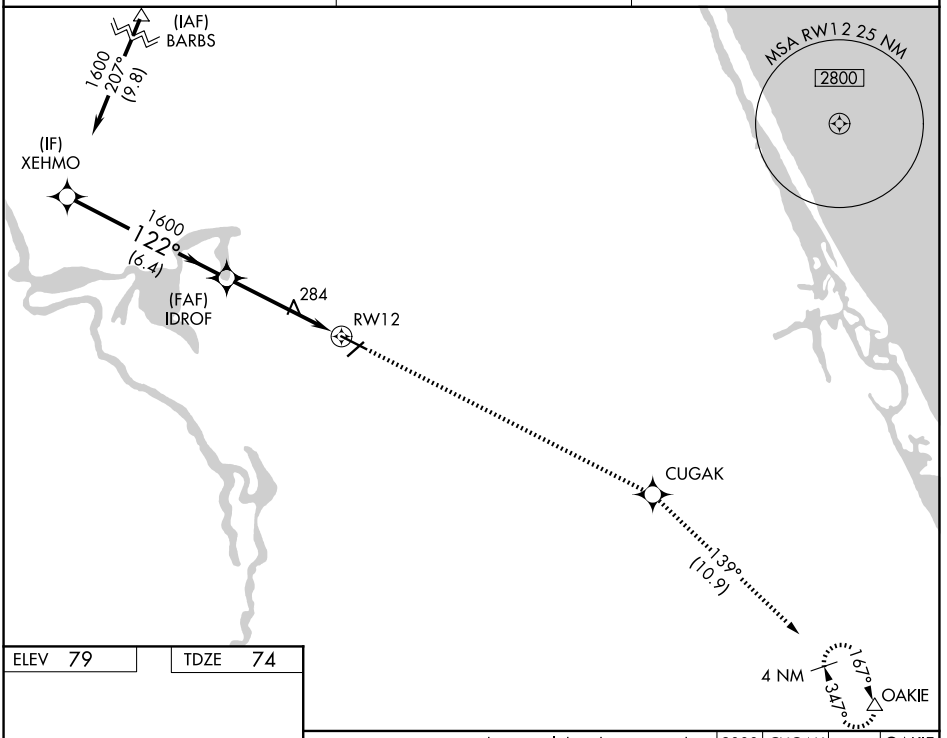

ELEV 79 | TDZE 74



HIRL Rwy 12-30 L
MIRL Rwy 5-23 L
REIL Rwys 12 and 30 L

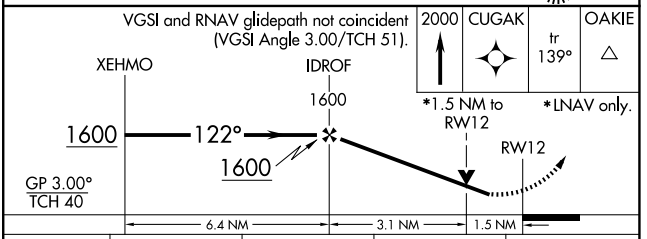

CATEGORY	A	B	C	D
LPV DA	404-1¼ 330 (400-1¼)			
LNAV/VNAV DA	528-1½ 454 (500-1½)			
LNAV MDA	600-1 526 (600-1)		600-1½ 526 (600-1½)	

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026