RNAV (GPS) RWY 17

SAN MARCOS RGNL (HYI)


WAAS CH 77832 W17A	APP CRS 171°	Rwy Ldg 5214 TDZE 595 Apt Elev 595


RNP APCH - GPS.


Circling NA for Cat E southwest of Rwy 13-31. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BAZ altimeter setting. Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use BAZ altimeter setting and increase LPV DA to 1003 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1095 feet; increase all MDAs 60 feet and LNAV visibility Cats C/D/E ⅛ SM, and Circling visibility Cats C/D ¼ SM.


MISSED APPROACH: Climb to 3100 direct CILAK and hold.

ATIS	AUSTIN APP CON	SAN MARCOS TOWER ★	GND CON
120.825	119.0 370.85	126.825 (CTAF) L	120.125

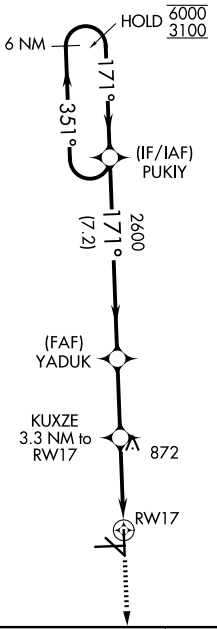


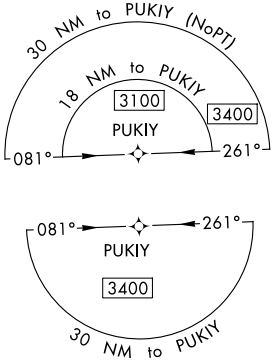



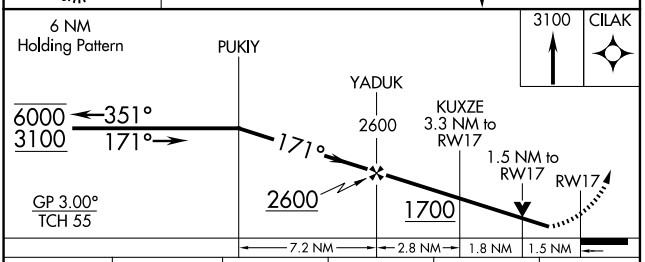

CATEGORY	A	B	C	D	E
LPV DA	960-1 365 (400-1)				
LNAV/VNAV DA	1052-1⅜ 457 (500-1⅜)				
LNAV MDA	1140-1 545 (600-1)		1140-1⅝ 545 (600-1⅝)		
CIRCLING	1140-1 545 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)	

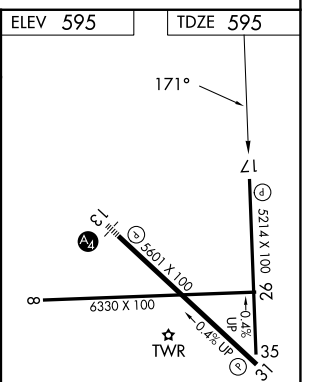

MIRL Rwys 8-26, 13-31, and 17-35 L

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026