RNAV (GPS) RWY 31


SAN MARCOS RGNL (HYI)

WAAS	APP CRS		
CH **90432**	**306°**	Rwy Ldg	**5601**
W31A		TDZE	**583**
		Apt Elev	**595**


Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ⅛ mile and LNAV Cat C/D/E and Circling Cat C/D visibility ¼. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3500 direct ORALE and hold.

ATIS	AUSTIN APP CON	SAN MARCOS TOWER ★	GND CON
120.825	**119.0 370.85**	**126.825** (CTAF) L	**120.125**

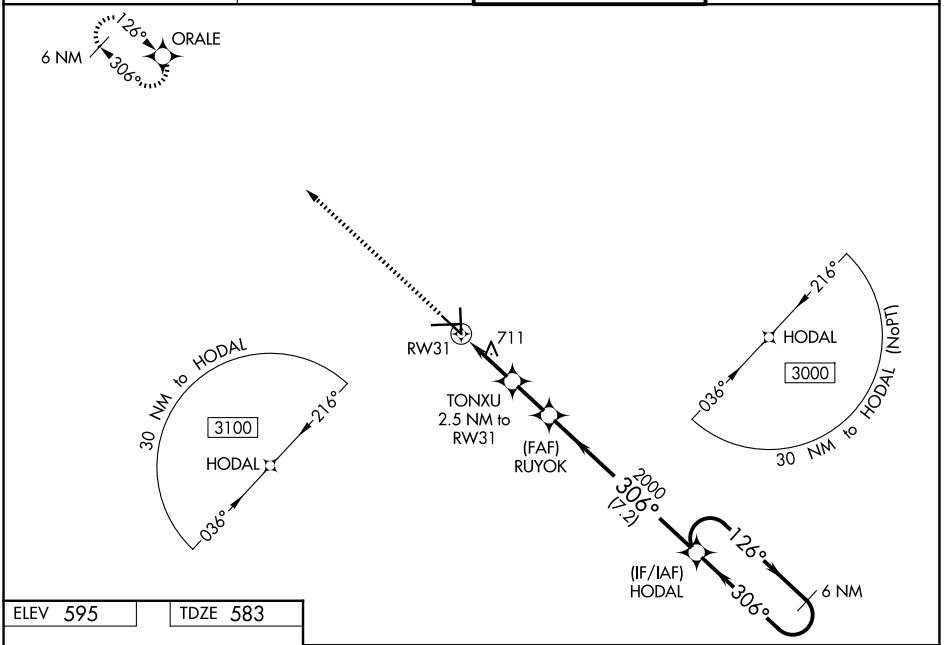

ELEV 595 TDZE 583



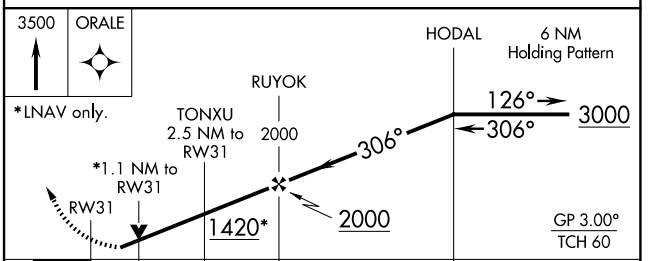

CATEGORY	A	B	C	D	E
LPV DA	860-⅞ 277 (300-⅞)				
LNAV/VNAV DA	906-1 323 (400-1)				
LNAV MDA	980-1 397 (400-1)		980-1⅛ 397 (400-1⅛)		
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

MIRL Rwys 8-26, 13-31 and 17-35 L

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026