WAAS CH 72932 W08A	APP CRS 081°	Rwy Ldg 6330 / TDZE 589 / Apt Elev 595

RNAV (GPS) RWY 8


SAN MARCOS RGNL (HYI)


RNP APCH.

Circling NA for Cat E SW of Rwy 13-31. Rwy 8 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP NA with New Braunfels altimeter setting. When local altimeter setting not received, use New Braunfels altimeter setting and increase LPV DA to 882, LNAV/VNAV DA to 953 and increase all MDA 60 feet; increase LNAV Cat C/D/E and Circling Cat C/D visibility ¼ SM.


MISSED APPROACH: Climb to 3000 direct QIMIB and hold.

ATIS	AUSTIN APP CON	SAN MARCOS TOWER ★	GND CON
120.825	119.0 370.85	126.825 (CTAF) L	120.125

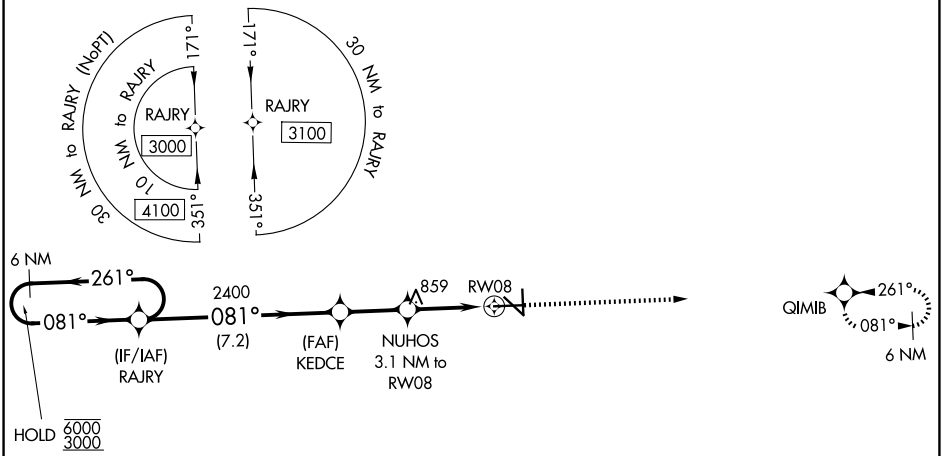

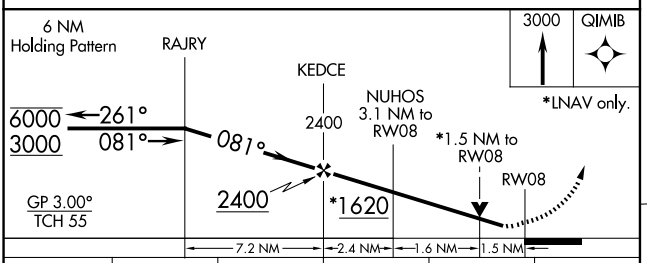

CATEGORY	A	B	C	D	E
LPV DA	839-1 250 (300-1)				
LNAV/VNAV DA	910-1 321 (400-1)				
LNAV MDA	1120-1 531 (600-1)		1120-1½ 531 (600-1½)		
CIRCLING	1120-1 525 (600-1)		1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

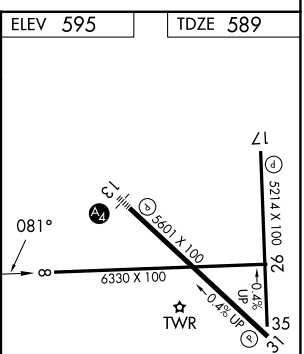

MIRL Rwys 8-26, 13-31, and 17-35 L

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026