ILS or LOC RWY 22

EVANSVILLE RGNL (EVV)

LOC/DME I-EVV	APP CRS	Rwy Ldg	8021
109.9	221°	TDZE	422
Chan 36		Apt Elev	422

RADAR or DME required for procedure entry at AUGUS.


Circling Rwy 9 NA at night. For inop ALS, increase S-LOC 22 Cats C and D visibility to 1¾ SM. DME minimums: For inop ALS, increase S-LOC 22 Cats C and D visibility to RVR 6000. * RVR 1800 authorized with use of FD or AP or HUD to DA.


ASR

MALSR


MISSED APPROACH: Climb to 1000 then climbing right turn to 2500 direct PXV VORTAC and hold.

ATIS	EVANSVILLE APP CON *	EVANSVILLE TOWER *	GND CON	UNICOM
120.2	124.025 290.9	118.7 (CTAF) L 257.8	121.9	122.95

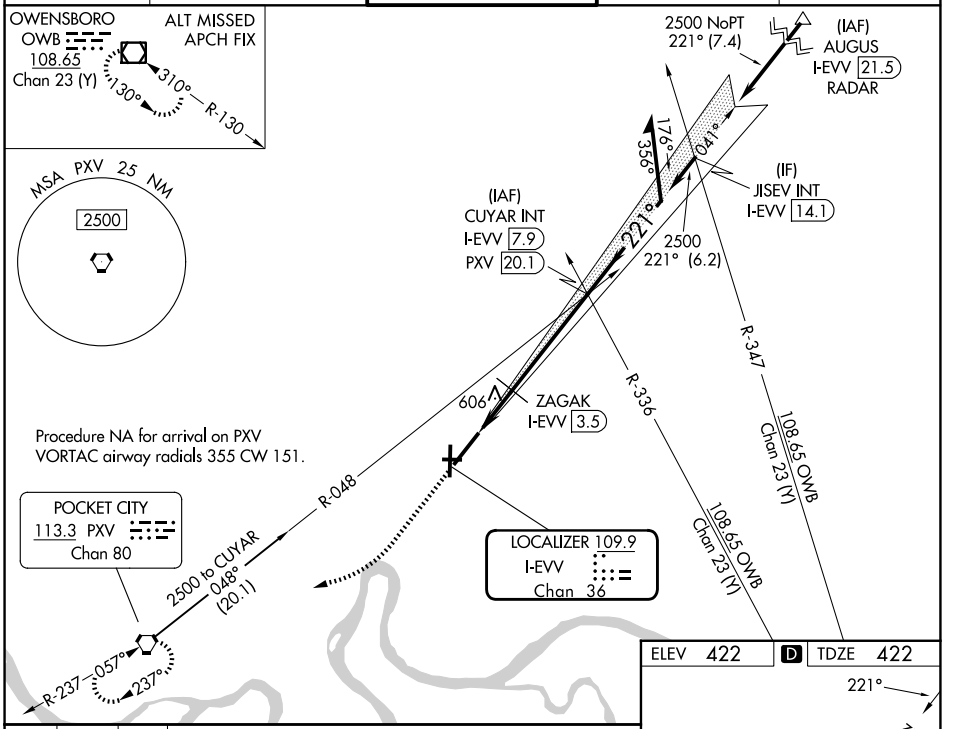

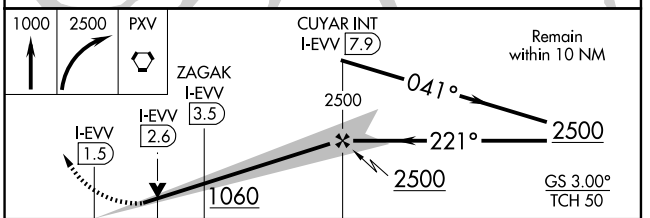

CATEGORY	A	B	C	D
S-ILS 22*	622/24 200 (200-½)			
S-LOC 22	1060/24 638 (700-½)		1060-1⅜ 638 (700-1⅜)	
CIRCLING	1060-1 638 (700-1)		1060-1¾ 638 (700-1¾)	1060-2 638 (700-2)
ZAGAK FIX MINIMUMS (DME REQUIRED)				
S-LOC 22	840/24 418 (500-½)		840/40 418 (500-¾)	
CIRCLING	920-1 498 (500-1)	1040-1 618 (700-1)	1040-1¾ 618 (700-1¾)	1040-2 618 (700-2)

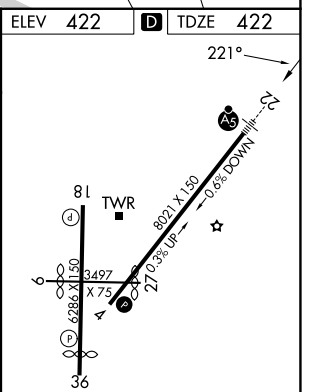

HIRL Rwys 4-22 and 18-36 L
REIL Rwys 4, 18, and 36 L
MIRL Rwy 9-27 L

FAF to MAP 6.4 NM

Knots	60	90	120	150	180
Min:Sec	6:24	4:16	3:12	2:34	2:08

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026