RNAV (GPS) Y RWY 5L

RALEIGH-DURHAM INTL (RDU)

WAAS CH 48813 W05A	APP CRS 054°	Rwy Ldg 10000 TDZE 384 Apt Elev 435


RNP APCH-GPS.


Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500. Use of FD or AP required during simultaneous operations.


MALSR

MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 direct DUHAM and hold.

D-ATIS	RALEIGH APP CON	RALEIGH TOWER	GND CON	CLNC DEL	CPDLC
123.8	127.675 307.9	127.45 257.8	121.9 348.6	120.1	

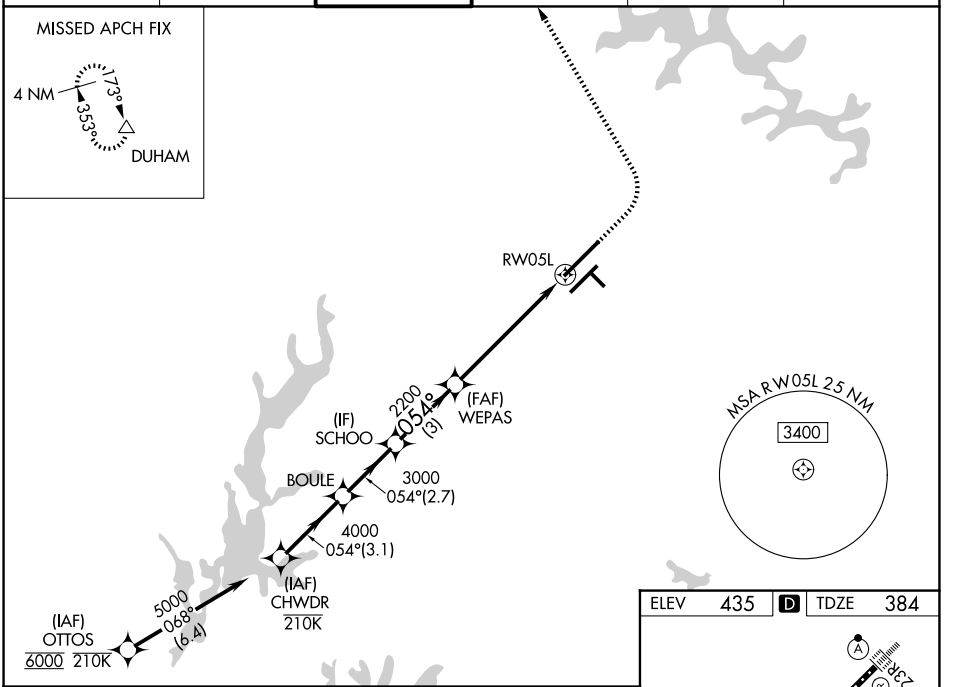

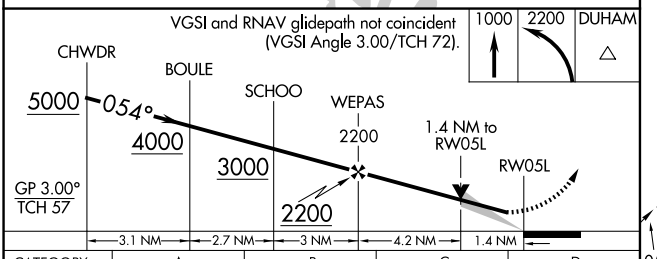

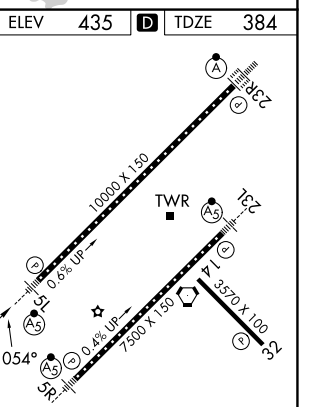

CATEGORY	A	B	C	D
LPV DA	598/18	214 (200-½)		
LNAV/VNAV DA	748/35	364 (400-⅝)		
LNAV MDA	880/24	496 (500-½)	880/50	496 (500-1)
CIRCLING	960-1	525 (600-1)	1020-1½ 585 (600-1½)	1180-2½ 745 (800-2½)

REIL Rwy 32
MIRL Rwy 14-32
HIRL Rwys 5R-23L and 5L-23R
TDZ/CL Rwys 23R, 23L and 5L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026