WAAS	APP CRS	Rwy Ldg	7619
CH 40002	208°	TDZE	4977
W21A		Apt Elev	5045

RNAV (GPS) RWY 21L

PRESCOTT RGNL/ERNEST A LOVE FLD (PRC)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 47°C. For inoperative ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1⅛ SM, and LNAV Cat C/D visibility to 1⅜ SM. Circling Rwy 3L, 12, 30 NA at night.
Missed approach requires a minimum climb of 345 feet per NM to 7300.


MALSR

MISSED APPROACH: Climb to 5500 then climbing right turn to 9100 direct DILLY and hold, continue climb-in-hold to 9100.


ATIS	PHOENIX APP CON	PRESCOTT TOWER★	GND CON		UNICOM
127.2	133.575 281.55	125.3 (CTAF) L 257.9	121.7	128.75 L	122.95

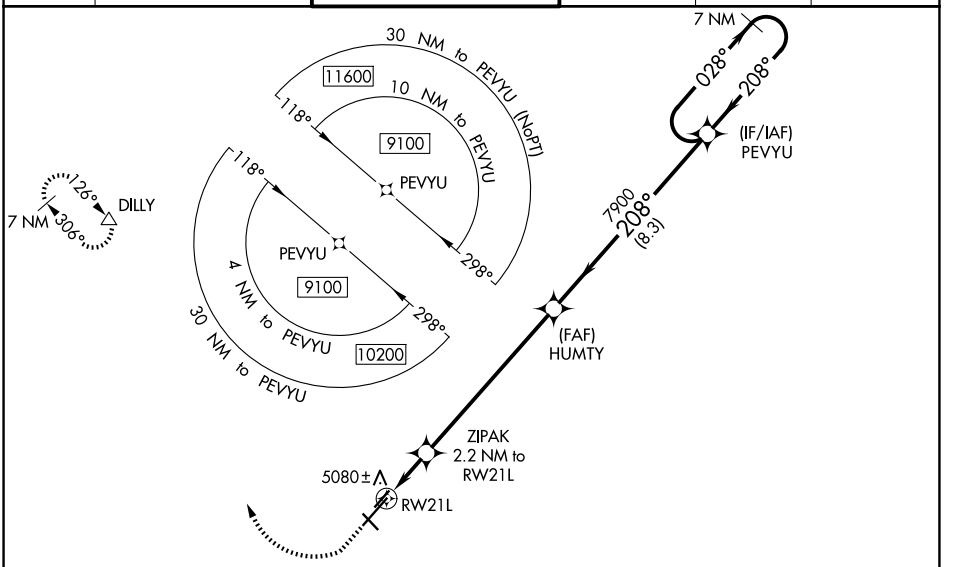

ELEV 5045 D TDZE 4977

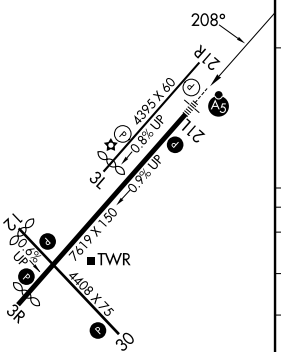

MIRL all rwys L
REIL all rwys except 21L L

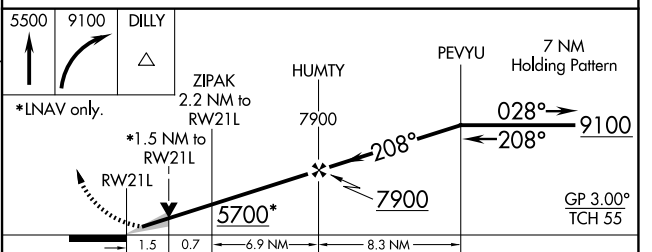

CATEGORY	A	B	C	D
LPV DA#	5177-½ 200 (200-½)			
LPV DA	5277-½ 300 (300-½)			
LNAV/VNAV DA	5391-⅞ 414 (400-⅞)			
LNAV MDA	5480-½ 503 (500-½)		5480-1 503 (500-1)	
CIRCLING	5520-1 475 (500-1)	5760-1 715 (800-1)	6080-3 1035 (1100-3)	6680-3 1635 (1700-3)

SW-4, 29 OCT 2026 to 26 NOV 2026
SW-4, 29 OCT 2026 to 26 NOV 2026