RNAV (RNP) Z RWY 18L

AUSTIN-BERGSTROM INTL (AUS)

APP CRS	Rwy Ldg	9000
175°	TDZE	492
	Apt Elev	542


RADAR required. RNP AR APCH-GPS.


Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

ALSF-2

MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct HOOKK and hold.


D-ATIS	AUSTIN APP CON	AUSTIN TOWER	GND CON
124.4	127.225 317.65 (E) 120.875 270.25 (S) 119.0 370.85 (W)	121.0 281.5	121.9 348.6

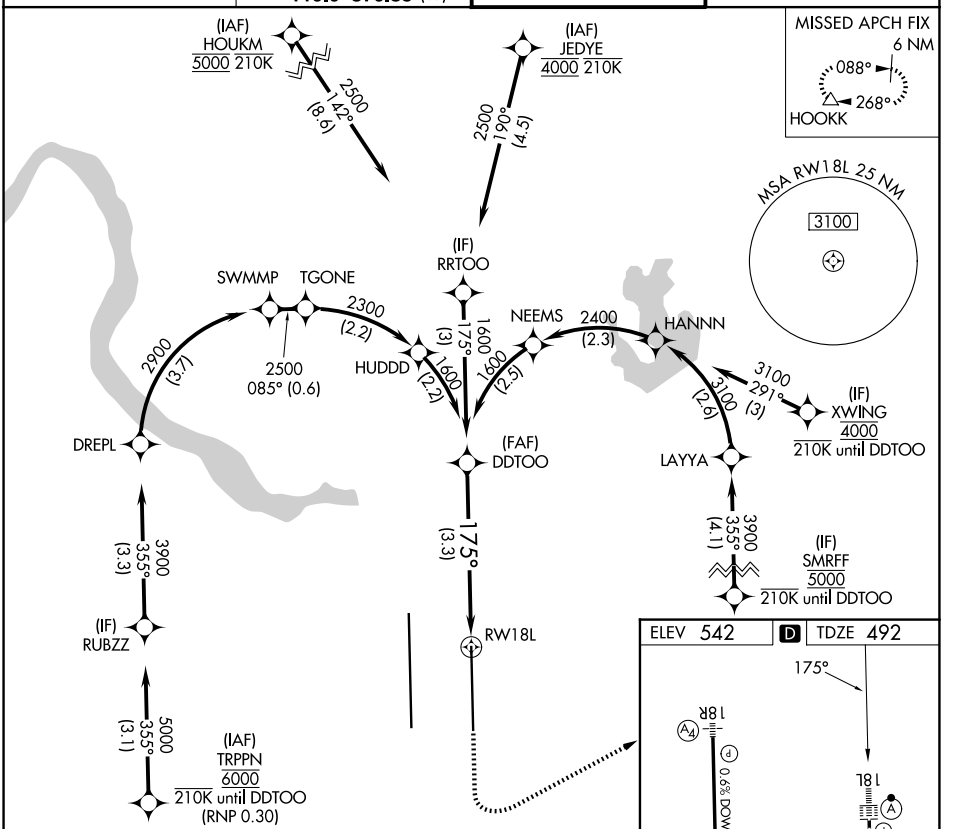

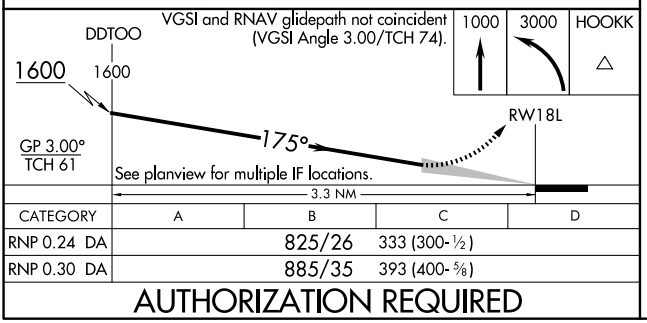

CATEGORY	A	B	C	D
RNP 0.24 DA		825/26	333 (300-½)	
RNP 0.30 DA		885/35	393 (400-⅝)	

AUTHORIZATION REQUIRED

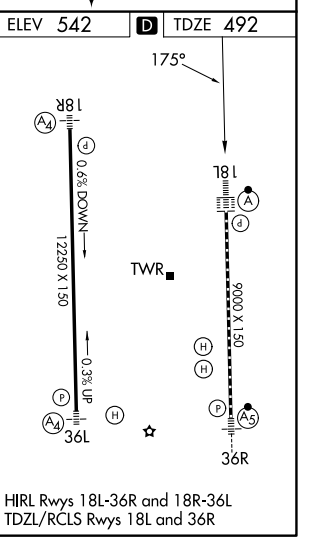

HIRL Rwys 18L-36R and 18R-36L
TDZL/RCLS Rwys 18L and 36R

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026